



**MKMARTIN**  
ENTERPRISE Inc.



[www.mkmartin.ca](http://www.mkmartin.ca)







## **E&OE**

Errors and omissions excepted November 2020. Pricing and specifications printed in this catalogue are current at printing and may be subject to change without notice. For current information on all of our products, please contact MK Martin directly.



## **Snow Products . . . . . 6**

Meteor - Pull Type . . . . .	7
Meteor - Single Auger . . . . .	8
Meteor - Double Auger . . . . .	10
Meteor - Features & Options . . . . .	11
Meteor - Skidsteer . . . . .	13
Meteor - Power Pack . . . . .	14
Meteor - Loader Mount . . . . .	15
Meteor - Self Powered Snow Blower . . . . .	16
Commercial SnowThrowers . . . . .	17
Commercial SnowThrower Features . . . . .	20
Commercial SnowBlowers . . . . .	21
Commercial SnowBlower Features . . . . .	24

## **Landscape/Estate Products . . . . . 26**

Pulsar - Skidsteer (Hydraulic) . . . . .	27
Pulsar . . . . .	28
Pulsar Plus . . . . .	30
Pulsar Wing . . . . .	32
Pulsar - Finishing Mower . . . . .	34
Pulsar - Trail/UTV Mower . . . . .	36
Axis Tool Arm . . . . .	38
3PH Box Blade . . . . .	40
Track Curry . . . . .	41
Light Duty Grader Blade . . . . .	42
Grader Blade . . . . .	43
XD Grader Blade . . . . .	44
Grader Leveler . . . . .	46
Land Plane . . . . .	47
Land Leveler . . . . .	48
Rotary Tiller (3PH/Hydraulic) . . . . .	50
Cultivator . . . . .	52
Landscape Rake . . . . .	52
Dump Box . . . . .	53
Weight Box . . . . .	54

---

**Agricultural Products . . . . . 55**

Gravity Box . . . . . 56  
1200 Gravity Box. . . . . 58  
Stack N Fold Toolbar . . . . . 59  
Disc Mower Implement Caddy . . . . . 60  
Implement Caddy . . . . . 61  
Strip Cat . . . . . 62  
Interseeder . . . . . 66



*Five Year Limited Consumer Warranty  
90 Day Limited Commercial Warranty Including Gearboxes*

*For all warranty information, please contact MK Martin  
by phone at 1.855.664.2752 or by email at [sales@mkmartin.ca](mailto:sales@mkmartin.ca)*

# Snow Products



# Meteor - Pull Type



Models	SB54 P/T	SB60 P/T	SB68 P/T	SB72 P/T	SB78 P/T	SB87 P/T	SB97 P/T
<b>HP (Rec.)</b>	25 HP	25 HP	35 HP	35 HP	50 HP	60 HP	60 HP
<b>Cutting Width</b>	54"	60"	68"	72"	78"	87"	97"
<b>Cutting Edge</b>	Bolt On (1/2 x 4)						
<b>Auger Diam.</b>	14"	14"	14"	14"	15"	19"	19"
<b>Fan Diam.</b>	18"	18"	21"	21"	23"	27"	27"
<b>Chute Diam.</b>	8"	8"	10"	10"	10"	12"	12"
<b>Double Hood Deflector</b>	N/A	N/A	Std.	Std.	Std.	Std.	Std.
<b>Chute Rotation</b>	Manual (std.) or Hydraulic (opt.)						
<b>Chute Deflector</b>	std./opt.	std./opt.	opt./opt.	opt./opt.	opt./opt.	opt./opt.	opt./opt.
<b>Main Body Height</b>	25"	25"	25"	25"	28"	32-1/2"	32-1/2"
<b>3PH Mount</b>	CAT. 1	CAT. 1	CAT. 1	CAT. 1	CAT. 1 & 2	CAT. 2	CAT. 2
<b>Weight (LBS.)</b>	462	495	671	685	900	1,175	1,225



## Optional Equipment

- Hydraulic/manual chute rotators
- Back drag (manual or hydraulic)
- Tivar contact surfaces

1.855.664.2752



# Meteor - Single Auger



MK Martin's Meteor series 3PH snowblowers are built to get your work off the ground with durable performance and high-capacity design. The Meteor lineup is available in a range of models for 12 HP compact tractors to 20 HP farm tractors. Meteor snowblowers are available in single auger, double auger, pull type, and skidsteer models.

Models	SB48	SB54	SB60
<b>HP (Rec.)</b>	12 HP	15 HP	20 HP
<b>Cutting Width</b>	48"	54"	60"
<b>Cutting Edge</b>	1/4 x 1-1/2	3/8 x 1	3/8 x 1
<b>Auger Diam.</b>	12"	14"	14"
<b>Fan Diam.</b>	19"	21"	21"
<b>Chute Diam.</b>	7"	8"	8"
<b>Chute Rotation</b>		Manual Included	
<b>Chute Deflector</b>	Manual	Manual Standard/ Hydraulic Option (see pg. 11)	
<b>Main Body Height</b>	22.5"	25"	25"
<b>3PH Mount</b>	CAT. 1	CAT. 1	CAT. 1
<b>Weight (LBS.)</b>	266	366	396



# Meteor - Single Auger



## Features

- 5 year limited warranty on gearbox
- High tensile steel flighting
- 3PH quick attach compatible
- 5 blade fan/impeller
- SB48, SB54, and SB60 comes standard with manual rotators
- Manual chute deflector

Models	SB68	SB72	SB78	SB87	SB97
<b>HP (Rec.)</b>	30 HP	35 HP	50 HP	60 HP	75 HP
<b>Cutting Width</b>	68"	72"	78"	87"	97"
<b>Cutting Edge</b>	3/8 x 1	3/8 x 1	1/2 x 1-1/2	1/2 x 2	1/2 x 2
<b>Auger Diam.</b>	14"	14"	15"	19"	19"
<b>Fan Diam.</b>	21"	21"	23"	27"	27"
<b>Chute Diam.</b>	10"	10"	10"	12"	12"
<b>Chute Rotation</b>	Select Option				
<b>Chute Deflector</b>	Manual Standard/ Hydraulic Option (see pg. 11)				
<b>Main Body Height</b>	29"	29"	29"	36"	36"
<b>3PH Mount</b>	CAT. 1	CAT. 1	CAT. 1 & 2	CAT. 2	CAT. 2
<b>Weight (LBS.)</b>	506	540	748	1,034	1,106



# Meteor - Double Auger



Models	SB87D	SB97D	SB108D	SB120D
<b>HP (Rec.)</b>	60 HP	100 HP	125 HP	200 HP
<b>Cutting Width</b>	87"	97"	108"	120"
<b>Cutting Edge</b>	1/2 x 2	1/2 X 6*	1/2 x 6*	1/2 x 6*
<b>Auger Diam.</b>	15" (x2)	15" (x1) 19" (x1)	15" (x1) 19" (x1)	15" (x1) 23" (x1)
<b>Fan Diam.</b>	27"	32"	32"	36"
<b>Chute Diam.</b>	12"	13"	13"	13"
<b>Chute Rotation (Man/Hyd)</b>	Opt/Opt	NA/Std	NA/Std	NA/Std
<b>Chute Deflector (Man/Hyd)</b>	Std/Opt	Std/Opt	Std/Opt	Std/Opt
<b>Main Body Height</b>	36"	43"	43"	47"
<b>3PH Mount</b>	CAT. 2	CAT. 2 & 3	CAT. 2 & 3	CAT. 2 & 3
<b>Weight (LBS.)</b>	1,161	1,900	1,980	3,010
<b>Opt. 1000 RPM</b>	-	Yes	Yes	Yes

## PTO Options

Models	HP	Shaft	RPM
<b>87D/97D/108D</b>	100-125	6 Spline	540
<b>97D175/108D175</b>	125-175	6 Spline	540
<b>97DF1.75/108DF1.75</b>	125-175	1 3/4" 20 Spline	1,000
<b>97DF/108DF</b>	125-175	1 3/8" 21 Spline	1,000
<b>SB120D</b>	150-200	6 Spline	540
<b>SB120 DF 1.75</b>	150-200	1 3/4" 20 Spline	1,000
<b>SB120DF</b>	150-200	1 3/8" Spline	1,000

# Features & Options



## 3PH / Quick Attach

All models are built standard with 3 point hitches in Category 1 or Category 2, and are Quick Attach compatible.



## 1000 RPM PTO Kit

Available for 97D, 108D, and 120D models, this kit allows larger tractors to run at 1000 RPM PTO. The 1000 RPM Kit also raises the input shaft to allow the PTO shaft to run at a lesser angle on larger tractors increasing the efficiency and life of the driveline components.

*PTO shaft not included.*



## Gear Box

The heart of Meteor's power train is the time-proven Comer gearbox.



## Five Blade Fan

The Meteor five blade fan is ruggedly designed and built to quickly and consistently blow the snow out of the chute.



## High Tensile Steel Ribbon Flighting

To make sure you get the longest dependable service from your blower all Meteors have the highest quality High Tensile Steel Ribbon flighting on the auger providing strength to move the snow to the fan.



## Skid Shoes

Adjustable skid shoes are included with all snow blowers to protect your surface and your blower.



# Features & Options



## Chute Rotator

Meteor Snow Blower chute rotators come in manual (crank), hydraulic (orbital motor), and electric.



## Multi-Hinged Deflector

Meteor's Multi Hinged Deflector provides you with finer control over where your snow is blown.

*Cylinder not included.*



## Truck Loading Chute

- Provides up to 40" of additional Height
- Hydraulic Rotation
- Hydraulic Multi-Hinged Deflector



## Hydraulic Chute Deflector

Exit chute deflectors are available in manual or hydraulic (optional).

*Includes the cylinder and the hoses.*

# Meteor - Skidsteer



Meteor Snow Blowers for Skid Steer Loaders feature one piece, solid side plate construction for added strength and rigidity. They also feature an offset chute for better operator vision.

Models	SSB62	SSB66	SSB76	SSB86	SSB96
<b>Cutting Edge (Bolt-On)</b>	1/2 x 4	1/2 x 4	1/2 x 4	1/2 x 4	1/2 x 4
<b>Cutting Width</b>	62"	66"	76"	86"	96"
<b>Auger Diam.</b>	19"				
<b>GPM (min)</b>	14	14	14	23	33
<b>Mounting</b>	Universal Skidsteer Attach				
<b>Auger Diam.</b>	19"				
<b>Chute Diam.</b>	11"				
<b>Main Body Height</b>	31"				
<b>Chute Deflector</b>	Manual Std/Hydraulic Opt				
<b>Fan Diam.</b>	26"				
<b>Weight (LBS.)</b>	900	925	950	975	1025

Flow Rates	Code
14-17 GPM	A
18-20 GPM	B
20-22 GPM	B+
23-26 GPM	C
27-33 GPM	C+
33-40 GPM	D

Code "D" high flow package is recommended on the SSB 96.



# Meteor - Loader Mount



Models	SBLM66	SBLM76	SBLM86
<b>Recommended HP</b>	40-60HP	40-60HP	40-60HP
<b>Max. Operating Weight</b>	8,000 LBS.	8,000 LBS.	8,000 LBS.
<b>Cutting Width</b>	66"	76"	86"
<b>Cutting Edge</b>	3/8" x 3"	3/8" x 3"	3/8" x 3"
<b>Skid Shoes</b>	3/8" x 1-1/2"	3/8" x 1-1/2"	3/8" x 1-1/2"
<b>Auger Tube</b>	3-1/2" OD	3-1/2" OD	3-1/2" OD
<b>Auger Flighting</b>	5/16 x 2-1/4	5/16 x 2-1/4	5/16 x 2-1/4
<b>Auger Diameter</b>	19"	19"	19"
<b>Roller Chain</b>	#60	#60	#60
<b>Hitch Plate</b>	Quick-tach	Quick-tach	Quick-tach
<b>Chute Rotation</b>	Hydraulic	Hydraulic	Hydraulic
<b>Chute Diameter</b>	12"	12"	12"
<b>Main Body Height</b>	31"	31"	31"
<b>Chute Deflector</b>	Hydraulic	Hydraulic	Hydraulic
<b>Fan Diameter</b>	26"	26"	26"
<b>Fan Depth</b>	8"	8"	8"
<b>Auger Drive</b>	Hydraulic	Hydraulic	Hydraulic
<b>Fan Drive</b>	Hydraulic	Hydraulic	Hydraulic
<b>Weight (LBS.)*</b>	970	1,015	1,065

\*Weight includes snowblower only

# Hydraulic Power Pack



SBLMPP-30



SBLMPPCS-30

For use with loader mount hydraulic blowers.  
Available with the following Quick Tach:  
*(Must be specified at time of order)*

- Universal skidsteer
- Euro (ALO)
- JD 440/540 combination

Models	SBLMPP-30	SBLMPPCS-30
<b>Recommended HP</b>	40-60HP	40-60HP
<b>Capacity (gallons)</b>	30	30
<b>Flow Rate (PSI)</b>	30 GPM/2500 PSI	30 GPM/2500 PSI
<b>Mount</b>	3PH	3PH
<b>Weight</b>	535 LBS.	575 LBS.
<b>Height</b>	48"	48"
<b>Width</b>	39"	39"
<b>Depth</b>	30"	32"
<b>Max Operating Temp. (°C)</b>	2° C	30° C
<b>Max Operating Time (hours)</b>	2 Hour Duty Cycle	Full Duty Cycle
<b>Cooling System Included</b>	No	Yes



# Self Powered Snow Throwers



## Wired Remote

The wired controller allows for remote engine start and shutdown.

Oversized buttons allows operators to make quick and accurate adjustment of the chute rotation.



Model	S1054E	S1060E
Cutting Width	47"	53"
Motor Type	Honda 13HP	Honda 13HP
Electric Start	12 Volt	12 Volt
Clutch	Electric (start/stop blower)	
Rotor	16" @ 750 RPM	
Hood Rotator	Electric	Electric
Hood Deflector	Manual	Manual
Cutting Edge	Bolt on 1/4" x 3-1/2"	
Overall Width	54"	60"
Overall Depth	36"	36"
Main Body Height	22.75"	22.75"
Weight	470 lbs.	545 lb.



# Commercial SnowThrowers



Featuring side plates that don't allow spill-over, the SnowThrower directs the snow into the rotor, throwing the snow into the chute. As this is a single-stage piece of snow equipment, it uses 20% less power required than conventional two-stage SnowBlowers. SnowThrowers don't throw as far as SnowBlowers, allowing for more control in smaller, tighter areas.

Models	1048	1054
HP	15-30	15-30
Width	48	54
Mount	CAT. 1	CAT. 1
PTO Drive (RPM)	540	540
Stages	1	1
Rotor	16"	16"
Cutting Edge	Heat Treated Bolt-On	Heat Treated Bolt-On
Chute Rotator	Hyd.	Hyd.
Deflector Stages	1	1
Chute Deflector (Man/Hyd)	Std/Opt	Std/Opt
Weight	450 lbs.	490 lbs.



# Commercial Snow Throwers



Models	2048	2054	2060
HP		25-55	
Width	48"	54"	60"
Mount		CAT. 1	
PTO Drive (RPM)		540	
Stages		1	
Rotor		24"	
Cutting Edge		Bolt-On AR400	
Chute Rotator		Hydraulic	
Deflector Stages		1	
Chute Deflector (Man/Hyd)		Hydraulic	
Weight	835 lbs.	890 lbs.	950 lbs.

Models	2054H	2062H	2076H
Width	54"	62"	76"
Mount		USSP Hitch	
Stages		1	
Rotor		24"	
Oil Bath Chain		Standard	
Cutting Edge		Bolt-On AR400	
Chute Rotator		Hydraulic	
Deflector Stages		1	
Chute Deflector (Man/Hyd)		Hydraulic	
Weight	900 lbs.	970 lbs.	1,090 lbs.

# Commercial SnowThrowers



Models	S2048	S2054	S2060
HP		25-55	
Width	48"	54"	60"
Mount		CAT. 2	
PTO Drive (RPM)		540	
Stages		1	
Rotor		24"	
Oil Bath Chain		Standard	
Cutting Edge		V-Edge with Trip	
Skid Shoes		Carbide Shoes & Side Plates	
Chute Rotator		Hydraulic	
Deflector Stages		2	
Chute Deflector (Man/Hyd)		Hydraulic	
Weight	900 lbs.	1,120 lbs.	1,300 lbs.

Models	S2048/1000	S2054/1000	S2060/1000
HP		50-75	
Width	48"	54"	60"
Mount		CAT. 2	
PTO Drive (RPM)		1000	
Stages		1	
Rotor		24"	
Oil Bath Chain		Standard	
Cutting Edge		V-Edge with Trip	
Skid Shoes		Carbide Shoes & Side Plates	
Chute Rotator		Hydraulic	
Deflector Stages		2	
Chute Deflector (Man/Hyd)		Hydraulic	
Weight	900 lbs.	1,120 lbs.	1,300 lbs.



# Commercial SnowThrower Features



## Carbide Skid Shoes and Cutting Edge

The carbide skid shoes and cutting edge are available on all models, giving you longer life for both the skid shoes and cutting edge.



## Manual Chute Rotator

Ideal for those with an open cab or those without hydraulic hookups, the manual chute allows you to manually rotate the chute to control the direction of the snow as you throw it.



## Manual Chute Deflector

The manual chute deflector allows you to change the height of the thrown snow without hydraulic hookups.



## Multi-Hinged Deflector

The multi-hinged deflector allows the snow to be dumped closer to the blower, making it ideal for sidewalks and municipal use.



## Short Chute

The short chute is less likely to clog during high speed clearing, making it the ideal companion for your snow thrower.

# Commercial SnowBlower

---



*4000 Series Commercial SnowBlower*



*6000 Series Commercial SnowBlower*



# Commercial SnowBlower

- 6 Blade Impeller
- AR400 Fan Blades - 1/2"
- AR400 3/8" End Plates Double Thickness at Edge
- AR400 Standard Housing - 1/4"
- AR400 Rotating Housing - 3/8"
- Carbide Skid Shoes
- 3/4" x 6 Heat Treated Bolt On Cutting Edge
- 1/2" Thick Solid Flight on Bottom Auger


Standard Models	4097	4108	4120
HP (Max.)		200	
Cutting Width	97"	108"	120"
Main Body Height		47"	
Mount		CAT. 2 & 3	
Impeller (Fan)		32" - 3/8" AR400	
Impeller Depth		12"	
Impeller Blades		6	
Impeller Output Shaft		2 1/2"	
Rotating Housing		NA	
PTO Drive (RPM)		1000	
Stages		2	
Rotor		Ribbon Flighting (Flight Notching Available)	
Rotor (Tube)		4 1/2" OD HEAVY WALL	
Rotor (Flighting)		1/2 x 3 (Bottom) 5/16 x 2-1/4 (Top)	
Rotor (Diameter)		23" (Bottom) 15" (Top)	
Rotor (Drive Shaft)		1-3/4"	
Roller Chain (2)		#100	
Cutting Edge		1/2" x 6" Heat Treated Bolt-On	
End Plates		3/8" AR400 x 48" high	
Chute Diam.		13"	
Chute Rotator		Hydraulic	
Deflector Stages		2	
Chute Deflector		Hydraulic	
Work Light Kit		Std. (TL Models Only)*	
Cut Out Clutches		No	
Shear Pins		Yes	
Weight	2,050 lbs.	2,130 lbs.	3,010 lbs.

# Commercial SnowBlowers

Standard Models	6108	6108RH	6120	6120RH
HP (Max.)			300	
Cutting Width	108"	108"	120"	120"
Main Body Height			49"	
Mount			CAT. 2 & 3	
Impeller (Fan)			36"	
Impeller Depth			12"	
Impeller Blades			6 x 1/2" AR400	
Impeller Output Shaft			2 1/2"	
Rotating Housing	N/A	Yes	N/A	Yes
PTO Drive (RPM)			1000	
Stages			2	
Rotor		Solid Flighting (Flight Notching Available)		
Rotor (Tube)		6 5/8" OD HEAVY WALL		
Rotor (Flighting)		1/2" (Bottom) 1.4" (Top)		
Rotor (Diameter)		24" (Bottom) 12" (Top)		
Rotor (Drive Shaft)		1 3/4"		
Roller Chain (2)		#100 (Bottom) #80 (Top)		
Cutting Edge		3/4" x 6" Heat Treated Bolt-On		
End Plates		3 End Plates		
Chute Diam.		13"		
Chute Rotator		Hydraulic		
Deflector Stages		2		
Chute Deflector		Hydraulic		
Work Light Kit		Std. (TL Models Only)*		
Cut Out Clutches		Yes		
Shear Pins		Not Needed		
Weight	3,200 lbs.	3,800 lbs	3,400 lbs.	4,000 lbs.



# Commercial SnowBlower Features



## 1000 RPM Gearbox

This custom built gearbox was built to handle the toughest circumstances and deliver 300 continuous horsepower to the augers. The heat treated 3-3/4" wide spur gears transfer power from your tractor to the fan.



## Adjustable Skid Shoes

The skidshoe provides incremental adjustment as it wears so both skid shoes wear together.



## Hydraulic Chute Rotator

The hydraulic rotator is ideal for tractors with cabs or for contractors/property managers needing to make frequent adjustments.



## Self-Deicing Auger Sprockets

To prevent chain jumping from ice buildup, the sprockets feature reliefs which allow the sprockets to self clean as they mesh with the chain.



## Rotating Fan Housing

The rotating fan housing allows operators to quickly move snow into windrows by discharging the snow to the right or left without passing it through the chute.



## Six Blade Impeller

All Commercial Meteor SnowBlowers feature a standard 6 blade fan. The six blades not only evacuate high volumes of snow quickly, but also feature tighter tolerance to the housing increasing velocity of the snow exiting the chute.



# Commercial SnowBlower Options




## 1000 to 540

The 1000 RPM to 540 gear reducer is designed to reduce your tractor's PTO speed from 1000 RPM to 540 RPM.



## Auger Chain Tensioners

Torsion sprung tensioners ensure that the appropriate amount of pressure remains on the chain to prevent skipping.




## Work Light Kit

Positioned on the side of the chute, these work lights allow you to see better when working in low light conditions.



## Telescopic Chute

The telescopic chute is ideal for blowing snow into trucks or tall snow banks in high snow fall areas.



## Bank Cutters

Available either in fixed or hydraulic options, these bank cutters reach above the blower's body, directing snow down to the augers.



## Multi-Hinged Deflector

The multi-hinged deflector allows the snow to be dumped closer to the blower, making it ideal for sidewalks and municipal use.

# Landscape/ Estate Products



# Pulsar - Skidsteer (Hydraulic)



Flow Rates	Pack. Codes
14-17 GPM	A
18-20 GPM	B
20-22 GPM	B+
23-26 GPM	C
27-33 GPM	C+
33-40 GPM	D

The hydraulically driven Pulsar series was designed for mowing grass and light brush, up to 2" in diameter. Available in 60" and 72" cutting widths the skidsteer mount Pulsar can cut almost any desirable height.

The heavy 3/16" material deck and deck supports provide the durability for many years of dependable service. The front of the Pulsar features a push bar that bends tall grasses and brush under the deck. Our unique drive spindle is supported by 2 bearings allowing us to couple the hydraulic motor directly onto the drive spindle, eliminating the need for a gearbox.

With the standard 3 blades on the blade bar coupled with our unique float linkage, the Pulsar follows the contour of your cutting area.

Model (Hydraulic)	PRCH60	PRCH72
Shipping Weight (LBS.)	770	985
3PH Mount	NA	NA
Cutting Height	min 2"	min 2"
Cutting Path	60"	72"
Max Brush Diameter	2"	2"
Overall Width	66"	78"
Tip Speed (Ft/Min)	N/A	N/A
Acres/Hr (5 MPH)	2.73	3.27
Wheels (Segmented)	NA	NA
Blades (Qty.)	1/2" x 3" (3)	1/2" x 3" (3)
Hydraulic Requirement*	See Flow Rates	See Flow Rates
Deck	3/16	3/16
Stump Jumper	Yes	Yes
Protection	Relief Valve	Relief Valve

*\*To ensure optimum performance, hydraulic output must match motor package.*



The PTO powered Pulsar series of rotary cutters provide excellent mowing and shredding performance for tractors rated between 20-50 HP. The 3PH mount models are available in a variety of cutting widths, providing a cutting path from 48" - 72". To better adapt to your conditions, the Pulsar features an adjustable cutting height of 2" - 10" and a floating top link. This combination allows you to get the ideal cut for your field or roadside.

Model	PRC48LD	PRC48	PRC60	PRC66	PRC72	PRC72HD
<b>Cutting Path</b>	48"	48"	60"	66"	72"	72"
<b>Shipping Weight (LBS.)</b>	420	480	600	640	700	740
<b>Tractor HP (min)</b>	20	20	30	40	50	50
<b>3PH Mount</b>	CAT. 1	CAT. 1	CAT. 1	CAT. 1	CAT. 1	CAT. 1
<b>PTO RPM</b>	540	540	540	540	540	540
<b>Blades</b>	1/2" x 3"	1/2" x 3"	1/2" x 3"	1/2" x 3"	1/2" x 3"	1/2" x 3"
<b>Tip Speed (Ft/Min)</b>	13,100	13,100	12,462	13,708	14,955	14,955
<b>Wheels</b>	16" (Air Filled)		16" (Segmented)			

*The Pulsar Rotary Cutter is backed by a 5 Year Limited Warranty.*



**Segmented Wheel**



**Fixed Skid Shoe**



**Pulsar Blade Assembly**



**Floating Top Link**



**Slip Clutch**



**Chain Curtain Option**



# Pulsar Plus



The Pulsar Plus for tractors comes rated between 30 - 80 HP. This updated mower features not only Category 1, but also Category 2 and Quick Tach mounting options to fit your equipment. With a cutting path ranging from 60" - 120", and a cutting height of 2" - 10" with the standard floating top link, this mower will get the job done the first time. To ensure even cutting and shredding every time, the deck is outfitted with 3 blades covering more area on each pass.

Model	PRCPLUS60	PRCPLUS72	PRCPLUS84	PRCPLUS96	PRCPLUS120
<b>Cutting Path</b>	60"	72"	84"	96"	120"
<b>Shipping Weight (LBS.)</b>	700	865	1220	1475	1425
<b>Tractor HP (min)</b>	30-40	60	60	80	80
<b>Hitch Type</b>	CAT. 1 & 2 Quick Tach compatible				Draw Bar Hitch
<b>PTO RPM</b>	540	540	540	540	540
<b>Blades</b>	3 - 1/2" x 3"	3 - 1/2" x 3"	3 - 1/2" x 3"	3 - 1/2" x 3"	6 - 1/2" x 4"
<b>Tip Speed (Ft/Min)</b>	12,462	15,260	17,803	16,500	14,500
<b>Wheel Type (Qty.)</b>	16" Segmented (1)	16" Segmented (1)	16" Segmented (2)	16" Segmented (2)	16" Pneumatic (2)


*The Pulsar Rotary Cutter is backed by a 5 Year Limited Warranty.*



# Pulsar Plus



**Segmented Wheel**



**Chain Curtain Option**



**Blade Assembly**



**Floating Top Link**



**Slip Clutch**



**Bolt-On Skid Shoe**



MK Martin presents the Pulsar Wing. Available in a 15' model, the three triple blade assemblies make short work of stubble — whether in the pasture, field, or brush. Each wing can independently float 20° in either direction to conform to the contours of the ground. The 15' width of the cutter can be greatly reduced by folding up both hydraulic wings to better transport from one field to another, and to store the cutter in tight spaces.

## Features & Options

- 15' dual wing rotary cutter
- 4 heavy duty gearboxes, each covered with 5 year limited warranty
- Transport lock for each wing
- 1.5" diameter cutting capacity
- Each wing can float to conform to ground contours





# Pulsar Wing



Model	PW180
Shipping Weight (LBS.)	4,400
3PH Mount	Draw Bar Hitch
Cutting Height	3"-15"
Cutting Path	180"
Max Brush Diameter	1.5"
Overall Width (Wings Down)	184"
Folded Width (Wings Up)	78"
Tip Speed (Ft/Min)	15,100 ft/min on Wings 14,850 ft/min on center
Wheels (Pneumatic)	21"
Blades	9 blades 1/2"x4"
Tractor HP (min)	75HP
PTO RPM	540
Gearbox Rating (Wing)	140 HP
Gearbox Rating (Center)	105 HP
Gearbox Rating (Divider)	87 HP
Deck	3/16"
Stump Jumper	Yes
Protection	Independent Slip Clutch on Each Spindle



# Pulsar - Finishing Mower




The Pulsar Finishing Mower is available for a wide variety of lawn mowing applications. Available in four sizes, there is a size to fit your mowing needs. Riding on four solid rubber tires, the Pulsar Finishing Mower floats smoothly over your lawn without worry of flat tires. A floating top link ensures that all four wheels keep contact with the ground as your 3PH equipped tractor pulls it along.

Model	PFM48RD	PFM60RD	PFM72RD	PFM90RD
Cutting Width	48"	60"	72"	90"
Overall Width	50"	62"	74"	93"
Weight (LBS.)	370	435	525	714
Acres/Hr@5 MPH	2.43	3.03	3.63	4.57
HP Required	14/20	20/25	25/30	30/40
3PH Mount	CAT. 1	CAT. 1	CAT. 1	CAT. 1
RPM @ PTO Shaft	540	540	540	540
Number of Blades	3	3	3	5
Tip Speed (Ft/Min)	15,660	18,000	16,850	16,288
Wheels	Solid Rubber Wheel	Solid Rubber Wheel	Solid Rubber Wheel	Solid
Cutting Height	2" - 5"	2" - 5"	2" - 5"	2" - 5"

*The Pulsar Rotary Cutter is backed by a 5 Year Limited Warranty.*



**Blade Assembly**



**Floating Top Link**



**Solid Rubber Wheel**



**Adjustable Height**



**Rear Discharge Shield**



**Optional Chain Guard**



This rough cutting mower is built for creating and maintaining trails, managing your open fields, and for improving wildlife habitats before plowing and reseeding

## Features & Options

- 44" Cutting Width
- 19HP Briggs & Stratton
- 12 Volt electric start
- Remote e-Stop
- 2 Rotors with 3 blades each
- Adjustable cutting height (2"-7") with ratchet style adjustment
- 3 position hitch for straight or offset cutting
- Flat free tires
- Swivel wheels on front, fixed wheels on rear

# UTV Mower



Model	PTM48
Engine Brand	Briggs & Stratton
Engine HP	19
Starting System	Key (electric)
Fuel Tank	3 Gal.
Battery	12 Volt
Deck	Rear Discharge
Deck Thickness	10 ga
Blade Assembly	2 Rotors with 3 Blades each
Cut Width	44"
Cut Height	2" - 7"
Wheels	14 x 6
Weight	720 lbs



The Axis Tool Arm has been developed to provide an economical alternative for mowing road side ditches or along side fences. Offset design allows plenty of room to clear the tractor tires, as well as keeping the tractor on a more level surface. Should you hit a solid object with the outer edge of the tool attached to the arm, the Axis Tool Arm is equipped with shear bolt protection on a breakaway link. With a 55° cutting angle with the cylinder extended, and 90° cutting angle with the cylinder retracted, the operator has ample flexibility to match whatever terrain they are working with.

Model	AXIS4	AXIS5-6
<b>Weight (LBS.)</b>	751	900
<b>Offset</b>	60"	84"
<b>3PH Mount</b>	CAT. 1	CAT. 1 & 2
<b>Minimum Tractor Weight (LBS.)</b>	2,900	5,800
<b>Maximum Tool Weight (LBS.)</b>	480	800
<b>4' Rotary Cutter (Not Included)</b>	req. min. 30 HP	
<b>5' Rotary Cutter (Not Included)</b>	req. min. 60 HP	
<b>6' Rotary Cutter (Not Included)</b>	req. min. 80 HP	
<b>Cutting Angle Cyl. Ext.</b>	55°	
<b>Cutting Angle Cyl. Ret.</b>	90°	
<b>Tractor Remotes Req.</b>	2	
<b>Protection</b>	Shear Bolt	Shear Bolt



## Hydraulic Tool Lift

The Axis Tool Arm hydraulically pivots on your 3PH raising and lowering the tool as needed. With the Axis fully raised the mower can be folded in to provide safe road travel (image below).




## Hydraulic Tool Rotation

To provide the best results when mowing along ditches or around ponds, the tool carrier is hydraulically adjustable allowing mower adjustments to match the terrain grade.

## Stabalizer Arm to Cutter

Various attachment bracket are supplied with the Axis Toolbar to attach the Stabilizer Bar to the cutter. All four adaptors are included.

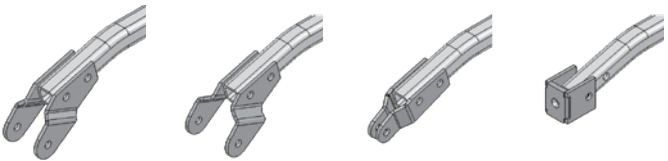

**Shown in order:** Pulsar, Kodiak, Fork Rear Wheel Style with 180° Wheel Adjuster, Fork Rear Wheel Style with Flat Wheel Adjuster



**Transport Lock**



**Retractable Weight Bar**



## 3PH Box Blade



The 3PH Box Scraper designed by MK Martin provides owners of small and large properties affordable options for land grading. Complete with steel cutting edges, height adjustable shanks, quick hitch compatibility, and a fully welded 3PH design, these Box Scrapers deliver impressive results.

The MK Box Scraper features two steel cutting edges. One is located on the inside of the box and the second is on the outside. These two reversible hardened steel cutting edges allow the operator to pull or push material.

### Height Adjustable & Replaceable Scarifier Tips

The height adjustable ripper shanks break up the soil allowing the cutting edge to redistribute the material as the box scraper is pulled along. Removeable shanks feature replaceable scarifier tips.

Model	Width	Shanks	Mouldboard	End Plates	3PH Mount	Weight (LBS.)
<b>448 STD</b>	4'	4	3/16"	1/4"	CAT. 1	308
<b>560 STD</b>	5'	4	3/16"	1/4"	CAT. 1	348
<b>566 HD</b>	5'6"	5	3/16"	1/4"	CAT. 1	415
<b>672 HD</b>	6'	6	3/16"	1/4"	CAT. 1	450
<b>784 HD</b>	7'	7	3/16"	1/4"	CAT. 1	500
<b>784 DLX</b>	7'	7	1/4"	1/4"	CAT. 2	555
<b>896 DLX</b>	8'	8	1/4"	1/4"	CAT. 2	612



# Track Curry



Groom your track or arena surface with the MK Martin Track-Curry. This easy to use tool will allow conditioning of track surfaces to your desired firmness. With two rows of heavy duty S-tines to cultivate the ground, an adjustable leveling bar fastened to the rear of the S-tines, and a 12" rolling drum behind the leveling bar, the Track-Curry provides an accurate depth gauge to cultivate and pack your soil for optimum performance. The MK Martin Track-Curry will condition your arena or track to the footing most suited for the health and safety of your horses.

## Spill Plates    Optional Wing    Scarifier Bar    Sprinkler Kit



Model	TC-5	TC-6	TC-7	TC-8
<b>Working Width</b>	5'	6'	7'	8'
<b>Number of Shanks</b>	13	15	17	19
<b>Shank Size</b>	1-1/4" x 3/8" x 22"			
<b>Shank Clearance</b>	16"	16"	16"	16"
<b>3PH Mount</b>	CAT. 1	CAT. 1	CAT. 1	CAT. 1
<b>HP Rating</b>	18 - 32	22 - 39	26 - 47	30 - 53
<b>Weight (LBS.)</b>	460	530	640	725
<b>Leveling Bar</b>	1/2" x 6" (double beveled)			



# Light Duty Grader Blade



*MKGN467 shown*

## Features

- Five Stops of angle adjustment (Forward and back)
- Manual angle adjustment
- 3/16" Mouldboard
- 3/8" x 6" reversible cutting edge
- Quick hitch compatible

Model	MKGB467	MKGB567	MKGB667
Horsepower	30 HP	30 HP	30 HP
Hitch		CAT 1.	
Width (in.)	48"	60"	72"
Weight (lbs.)	140	149	155
Reverse		Yes	
Mouldboard		3/16" Material	
Cutting Edge		3/8" x 6" Reversible	
Angle (Control)		Yes (Manual)	
Angle (Position)		5 Stops Forward / 5 Stops Reversed	

# Grader Blade



*Shown with optional Hydraulic Angle blade*

The 3PH Grader Blade from MK Martin makes maintaining your driveway and gravel areas easy. Ruggedly built with a reversible cutting edge, these blades are designed for years of service.

The Manual Blades have five stops of angle adjustment including a full turn around, while the optional Hydraulic Angle blades allow control of the blade from the comfort of your seat. With widths to match your equipment and property, there is an MK Scraper blade to help keep your grades up.

## Features

- 1/2" x 6" reversible cutting edge
- Full turn around with five locations forward and reverse on manual only
- 3/8" mouldboard - 98 series
- Hydraulic Angle (optional)
- Quick hitch compatible

Model	Max. HP	Width	Mouldboard	Center Pin	3PH Mount	Weight (LBS.)
<b>MKGB588</b>	45	5'	3/16"	2"	CAT. 1	180
<b>MKGB688</b>	45	6'	1/4"	2"	CAT. 1	200
<b>MKGB788</b>	45	7'	1/4"	2"	CAT. 1	215
<b>MKGB798</b>	75	7'	3/8"	3"	CAT. 2	577
<b>MKGB898</b>	75	8'	3/8"	3"	CAT. 2	616



## Extreme Duty Grader Blade for 100-150 HP Tractors

The Extreme Duty Grader Blade from MK Martin mounts to your 3-point tractor hitch. Powered by the hydraulics of your tractor, the XD series blade has hydraulic cylinders to adjust the offset of the arm, blade angle, and tilt of the blade. An additional hydraulic cylinder on the optional wheel kit helps with depth control.

The Extreme Duty grader blade is available in 8', 9' and 10' models for tractors with a rated horsepower of 100 and 150 HP.

Available options include dual gauge wheel kit with hydraulic cylinder.

### Features



**Hydraulic Angle**



**Hydraulic Tilt**



**Hydraulic Offset**

# XD Grader Blade



Model	8XD-100	9XD-100	9XD-150	10XD-150
<b>Horse Power (Max.)</b>	100	100	150	150
<b>3PH Mount</b>	CAT. 2 & 3			
<b>Mouldboard Thickness</b>	5/16"			
<b>Mouldboard Width</b>	96"	108"	108"	120"
<b>Mouldboard Height</b>	20"			
<b>Offset Adjustment</b>	27" left or right (hydraulic)			
<b>Adjustment Angle</b>	32° left or right (hydraulic)			
<b>Adjustment Tilt</b>	13° blade adjustment (hydraulic)			
<b>King Pin</b>	3-1/2"	3-1/2"	4"	4"
<b>Cutting Edge</b>	High Carbon 1/2" x 6" (reversible)			
<b>Weight (LBS.)</b>	1,572	1,666	1,695	1,745






# Grader Leveler



This two-in-one combination of leveling and scraping makes short work of your grading jobs. The first blade attacks the high spots cutting them down to size and the second blade further scrapes anything the first missed and fills in the hollows. With two blades cutting and filling it takes much less time and fewer passes to achieve the even distribution of material you are looking for.

The scraper can be 3PH mounted, or equipped with a skidsteer adapter plate to keep the work in front of you.

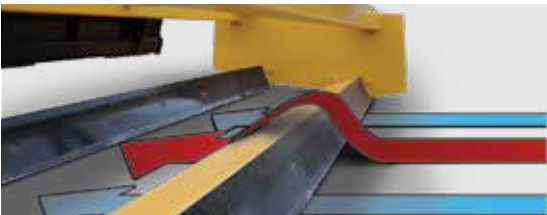

Model	GL578	GL678	GL778	GL878
<b>Working Width</b>	60"	72"	84"	96"
<b>Overall Width</b>	65"	77"	89"	101"
<b>Skid Shoes</b>	3/8" x 2 Reversible	3/8" x 2 Reversible	3/8" x 2 Reversible	3/8" x 2 Reversible
<b>Mouldboard Thickness</b>	1/4"	1/4"	1/4"	1/4"
<b>Cutting Edge</b>	1" Adjustment	1" Adjustment	1" Adjustment	1" Adjustment
<b>Weight (LBS.)</b>	566	630	696	760

# Land Plane



Designed to revive your laneway or gravel lots, the Land Plane provides acreage owners with a single tool to tear up hardpack, fill potholes, and grade for a smooth, desirable finish.

The Land Plane is available in 72", 84", and 96" widths giving operators the ideal working widths for their compact and utility tractors.



Two hydraulic cylinders power the scarifier bar deep below the surface, loosening the hard pan and pulling the material to the surface where it can be redistributed. The hydraulic control allows the operator to adjust pressure on-the-fly to compensate for the changing ground conditions without having to leave the operator's seat.

The Land Plane is available in either skid loader or 3PH mounts.

Model	LP678	LP778	LP878
<b>Working Width</b>	72"	84"	96"
<b>Overall Width</b>	77"	89"	101"
<b>Length</b>	69.5"	69.5"	69.5"
<b>Shank (Qty.)</b>	6	7	8
<b>Shank Tube</b>	4" x 6" x 1/4"		
<b>Cutting Edge (x2)</b>	Hardened 1/2" - Reversible 1" Adjustments		
<b>Skid Shoes</b>	3/8" x 2 Reversible		
<b>Cylinder</b>	Dual Hydraulic Cylinders for shank rotation		
<b>Weight (LBS.)</b>	1,140	1,240	1,350



# Land Leveler



These rugged scrapers come in a range of sizes from 8'-12' to fit your needs and equipment. Standard on all models is our 1/2" thick reversible hardened cutting edge, ready to smooth out the bumps and fill in the hollows. Cutting depth is controlled by a 3"x12" hydraulic cylinder so you can decide how much of a bite to take and adjust on the go. All models are well suited for feedlot and soil reclamation or swale cutting.



Model	LLT-8	LLT-10	LLT-12
Width	8'	10'	12'
Mount	Hitch	Hitch	Hitch
Tilt	Yes	Yes	Yes
Cutting Edge	Single	Single	Single
Side Plate	3/8"	3/8"	3/8"
Mouldboard	1/4"	1/4"	1/4"
Wear Plate	NA	NA	NA
Skidbar	1/2" Reversible	1/2" Reversible	1/2" Reversible
Weight	1555	1771	1898



# Land Leveler

## Features

- 1/2" x 6" reversible hardened cutting edge
- Equipped with a 10" jack or 15" available on request
- 3" x 12" hydraulic lift cylinder
- 3" x 6" cylinder to tilt 10° each way



**Adjustable  
Skid Bars**



**Tilt Indicator**



**Transport Lock**



LLP-8	LLP-10	LLP-12	LLP2-8	LLP2-10	LLP2-12
8'	10'	12'	8'	10'	12'
3PH	3PH	3PH	3PH	3PH	3PH
NA	NA	NA	NA	NA	NA
	Single			Double	
3/8"	3/8"	3/8"	3/8"	3/8"	3/8"
1/4"	1/4"	1/4"	1/4"	1/4"	1/4"
3/4"	3/4"	3/4"	3/4"	3/4"	3/4"
NA	NA	NA	NA	NA	NA
838	956	1077	945	1090	1238



# Rotary Tiller (3PH)



## Features & Options

- Replaceable Bolt-On Tines
- Self Lubricating Chain Drive
- Adjustable Skidshoes
- Floating Deflector
- Gear Box
- 3PH Mount Offset
- Slip Clutch

Models	RT486	RT546	RT606	RT726
<b>Horsepower</b>	15-30 HP	20-40 HP	20-50 HP	25-60 HP
<b>Hitch</b>	CAT. 1	CAT. 1	CAT. 1	CAT. 1
<b>Inner Width (in.)</b>	50	54	58	74
<b>Overall Width (in.)</b>	55.375	59.375	63.375	79.375
<b>Weight (lbs.)</b>	475	482	500	575
<b>Number of Flanges</b>	6	6	7	9
<b>Tines/Flange</b>	6 (C-Shape)	6 (C-Shape)	6 (C-Shape)	6 (C-Shape)
<b>Flange Spacing (in.)</b>	7.75	7.75	7.75	7.75
<b>Max Tillage Depth (in.)</b>	6.5	6.5	6.5	6.5
<b>Number of Skid Shoe Settings</b>	5	5	5	5
<b>Rotor Diameter (in.)</b>	17"	17"	17"	17"
<b>Rotor Speed @ 540 PTO (RPM)</b>	211	211	211	211
<b>Gearbox (HP)</b>	50HP @ 540	50HP @ 540	50HP @ 540	50HP @ 540
<b>Drive Chain</b>	#80	#80	#80	#80


# Rotary Tiller (Hydraulic)



Prepare your seedbed or garden for planting using the MK Martin Rotary Tiller. With standard features such as adjustable skidshoes, floating deflector, replaceable tines, and an oil bath drive chain, this tiller easily loosens soil for a variety of applications.

Available in a range of sizes, there's an MK Rotary Tiller for any application.

Models	RT726H
Horsepower	NA
Hitch	Skid steer attachment plate
Inner Width (in.)	74
Overall Width (in.)	79.375
Weight (lbs.)	575
Number of Flanges	9
Tines/Flange	6 (C-Shape)
Flange Spacing (in.)	7.75
Max Tillage Depth (in.)	6.5
Number of Skid Shoe Settings	NA
Rotor Diameter (in.)	17"
Rotor Speed @ 540 PTO (RPM)	NA
Gearbox (HP)	NA
Drive Chain	#80

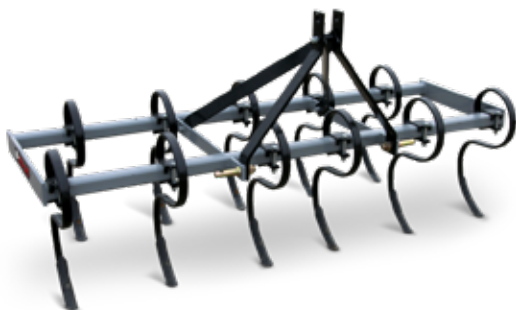

This line of economy cultivators is ideal for cultivating small fields and gardens.

Model	CU-5	CU-6	CU-7
Working Width	60"	72"	84"
Overall Width	60-1/2"	72-1/2"	84-1/2"
Weight (LBS.)	164	193	222
Tines (Heat Treated)	9 tines	11 tines	13 tines
3PH Mount	CAT. 1	CAT. 1	CAT. 1

## Landscape Rake

### Features

- 5 forward and 3 reverse positions with manual adjustment
- 5/16" x 1" x 15.25" spring tines
- CAT. 1 Quick Tach compatible



Model	MKLR5	MKLR6	MKLR7
Width	5'	6'	7'
MAX HP	50	50	50
Weight (LBS.)	250	263	285
Tines	30	36	42

# Dump Box



This general purpose 3PH Utility Dump Box comes in two sizes for the home owner, landscaper or wood lot owner.

- 3PH hookup CAT. 1
- Quick and easy dump
- Raise and lower to desired height for loading
- Heavy duty tubular sub frame
- 14 GA. material box structure

Model	Cap	Size	Weight (LBS.)
<b>DB495</b>	30 cu ft	18" x 48" x 48"	290
<b>DB395</b>	10 cu ft	10" x 36" x 36"	120





## 3PH Weight Box



With an internal material holding volume of 3.5 cubic feet and maximum holding weight capacity of 525 lbs, this weight box can add up to 575 lbs of balancing weight to your CAT. 1 3PH. This added weight backs up your tractor by offsetting your loader mounted attachments, helping to keep your tractor safely balanced during operation. This weight box has a tool holder, clean out hatch, and a 2" hitch receiver.

Specifications	MKWB
Hitch Type	CAT. 1
Box Volume	3-1/2 cu ft
Max Weight (box and fill) (LBS.)	575
Max Weight (fill only) (LBS.)	525
Quick Hitch Compatible	Yes

Fill Type	Weight Per Cubic Foot (lbs.)
Concrete	150
Gravel	110
Sand	100



# Agricultural Products





## Standard Features

- Viewing Windows
- LED Road Lights
- Front Ladder
- Unloading Door includes metering door
- Solid Welded Box Interior

Model	MK 3200		
Extension	N/A	8"	19"
Capacity (Bushels)	320	375	450
Hopper Construction	14 GA.		
Under Structure	3" x 6" x .188 wall rectangular tube		
Unloading Door	45" width		
Chute Height	17"-20"		
Box Dimensions			
Length	158"	158"	158"
Width	96"	96"	96"
Height (less wagon)	78"	86"	98"
Height (wagon & 22.5" wheel)	102"	110"	122"
Wheel Base	112"		



# Gravity Box



## Optional Equipment

- Horst Running Gear
- Center Dump Deflector
- Divider Kit
- Grain Shield Tarp Kit
- Hydraulic Door Opener
- Rear Ladder Kit



MK 5000			MK 6500		
N/A	8"	12"	N/A	8"	12"
500	570	605	645	745	800
12 GA.			12 GA.		
4" x 8"			4" x 8"		
.188" wall rectangular tubing			.188" wall rectangular tubing		
57" width (standard) 28" width x2 (divider)			57" width (standard) 28" width x2 (divider)		
17"-21"			16"-20"		
196"	196"	196"	229"	229"	229"
101"	101"	101"	115"	115"	115"
89"	98"	101"	91"	99"	103"
123"	131"	135"	125"	133"	137"
142"			156"		



# 1200 Gravity Box



Model	MKGW12000
Extension	N/A
Capacity (Bushels)	1,200
Hopper Construction	12 GA.
Under Structure	4x8x.25w
Unloading Door	15" length x 47" width X 2
Chute Height	18"
<b>Box Dimensions</b>	
Length	315"
Width	110"
Height (less wagon)	136"
Height (wagon & 22.5" wheel)	156"
Wheel Base	215"



# Stack N Fold Toolbar



The Stack N Fold Toolbar from MK Martin is designed to provide safe and easy transport of Strip Cat strip till systems. By stacking both end sections over the center section, the Stack N Fold Toolbar quickly reduces the overall width providing easier transport from field to field. The over centre design and locking pins ensure that the end sections remain securely in place during travel and when in storage.

Stack N Fold Toolbars can be configured with 2 to 4 remotes allowing you to control each side of the toolbar separately. This allows for easier service and maintenance, as well as for custom operations when you may not need the full width of the Strip Cat, such as on headlands and point rows.



## Features

- Available from 8-Row to 18-Row
- Allows for parallel horizontal stacking of row units
- Ideal for transport and storage
- Equipped with 2 large cylinders (5x30 fold cyl.)
- Equipped with 2 small cylinders (2x4)
- Requires 2 to 4 remotes depending on configuration



# Disc Mower Implement Caddy



The MK Disc Mower Implement Caddy transforms your 3PH disc mower into a pull-type unit to help reduce wear on the mower while reducing stress from your tractor. Using the adjustable top link, you can connect your disc mower faster and easier than before. With the addition of the adjustable hitch, you can level your caddy and mower for an even cut as you drive along.

The MK Disc Mower Implement Caddy comes in two models: inline (C1201) and offset (C1200).

Model	MKC1200	MKC1201
Weight (LBS.)	1,900	1,835
Max Implement Weight	1,400 lbs.	1,400 lbs.
Lift Cyl.	3x8	3x8
Tires	11L 15	11L 15
Main Frame	7x7 Tube	7x7 Tube
RPM	540	540
Driveline	#5	#5

## Features

### Adjustable Hitch



### Hydraulic (Option)



# Implement Caddy



The Implement Caddy by MK Martin converts your 3PH implements to trailed versions when access to a 3PH equipped unit is not available. Hydraulically raise and lower caddy to desired height. This alternative to conventional 3PH mounting allows greater flexibility over your work force.

Model	SCIC250	SCIC1700
Width	125"	152"
MAX HP	250	500
Weight (LBS.)	3,560**	7,750
Lift Cyl.	3-1/2 x 16	5 x 14
Lift Capacity (LBS.)	12,000	20,000
Category	CAT. 2 & 3	CAT. 4
Tires	12.5L	16.5 x 16.1

*\*\*Includes the weight of the weight box*





The Strip Cat is fully adjustable to your field conditions. Available in a 3PH or Trailed version the Strip Cat can be set up for either liquid or dry fertilizer application allowing an all in one tilling and fertilizing solution.


## Benefits

- Reduces field travel and compaction
- Improves fertilizer management
- Reduces soil erosion
- Increases germination

## Features

- Choose from 4-6-8-12-16 Row Units
- Standard 30" Spacing (Optional 22" Spacing)
- Independent row units with adjustable down pressure
- Dry lube bushings in joints
- Adjustable IRD Depth wheels
- 20" notched coulters (30% more cutting)
- Sunco Trash Managers to clean the tilled strip
- Independent spring loaded berm builders (height and angle adjustment)
- Dual wheel packers with adjustable down pressure
- All pull pin adjustments

# Strip Cat

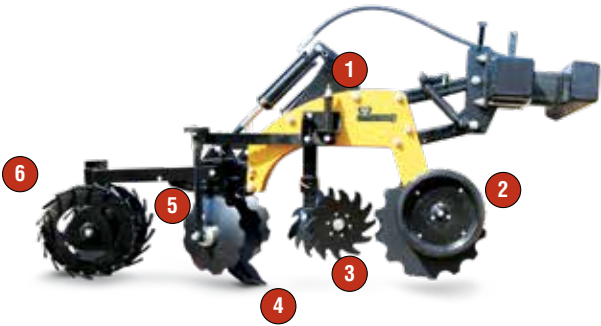






- 1 Hydraulic Reset
- 2 Row Depth Control & Residue Sizing
- 3 Sunco Trash Managers
- 4 Mole Knives
- 5 Berm Builders
- 6 Pack Wheels



## STRIP CAT ROW UNIT ORDER

<b>MAIN UNIT</b>  <b>SCBRU</b>	<b>TRASH MANAGER SET</b>  <b>SCSTM</b>	<b>SLITTER COULTER</b>  <b>A SCSNC      B SCSWC</b>	<b>KNIFE POINT</b>  <b>A SCSTPO      B SCLDPO</b>
<b>FIXED KNIFE ADAPTER</b>  <b>NOT USED WITH HYDTRIPPER 22855</b>	<b>KNIFE SHANK</b>  <b>A SCKLSTS      B SCKLSTL</b>	<b>PACKER/BERM ENHANCER</b>  <b>A SCBPT      B SCBPW      C SCBE</b>	
<b>INDEPENDENT BERM BUILDER</b>  <b>1 SCNIBBD      2 SCNIBBC</b>		<b>ROW DEPTH GAUGE</b>  <b>A SCIRD T      B SCIRD L</b>	<b>FLOATING TRASH MANAGER HEAD</b>  <b>BLANK IF NOT REQ. ST-5011196</b>

## STRIP CAT TOOL BAR

<b>C-C TOOL BAR</b>  <b>SIX ROW (30")</b> <b>A SCTB6R30</b> <b>8 ROW (30")</b> <b>SCTB8R30</b> <b>12 ROW (30")</b> <b>SCTBF12R30</b> <b>16 ROW (30")</b> <b>SCTBF16R30</b> <b>18 ROW (22")</b> <b>SCTBF18R22</b>	<b>HYDRAULIC KNIFE TRIPPER</b>  <b>6-30</b> <b>SCHTA6R30</b> <b>8-30</b> <b>SCHTA8R30</b> <b>12-30</b> <b>SCHTA12R30</b> <b>16-30</b> <b>SCHTA16R30</b> <b>18-22</b> <b>SCHTA18R22</b>
<b>TRAILER HITCH</b> <b>STANDARD TRAILER HITCH</b> <b>A SCTDF</b>  <b>NARROW TRAILER HITCH</b> <b>B SCNTDF</b> 	
<b>GAUGE WHEEL</b>  <b>STD. GAUGE WHEEL SET</b> <b>A SCSGW</b> <b>PUMP-DRIVE GAUGE WHEEL SET</b> <b>B SCPDGW</b> <b>INSIDE GAUGE WHEEL WINGED TOOLBAR</b> <b>C SCLGW</b>	



Model	Description	6 Row (30" Rigid)	8 Row (30" Rigid)	12 Row (30" Folding)	16 Row (30" Folding)	18 Row (22" Folding)
SCTB6R30	6 row 30" tool bar	1	-	-	-	-
SCTB8R30	8 row 30" tool bar	-	1	-	-	-
SCTBSF12R30	12 row 30" Stack N Fold	-	-	1	-	-
SCTB12R30	12 row 30" tool bar	-	-	1	-	-
SCTBSF16R30	16 row 30" Stack N Fold	-	-	-	1	-
SCTB16R30	16 row 30" tool bar	-	-	-	1	-
SCTB28R22	18 row 22" tool bar	-	-	-	-	1
SCBRU	Generation II row unit	6	8	12	16	18
SCSNC	Notched Coulter	6	8	12	16	18
SCSWC	Wavy Coulter	6	8	12	16	18
SCSTM	Sunco Trash Manager	6	8	12	16	18
ST5011196	Floating Trash Manager mnt	3	4	6	8	9
SCIRDT	Depth Gauge Wheel (set)	6	8	12	16	18
SCIRDC	Coulter Depth Gauge Wheel	6	8	12	16	18
22855	Fixed Knife Adaptor	6	8	12	16	18
SCNIBBD	Independent Berm Builder (cupped)	6	8	12	16	18
SCNIBBC	Independent Berm Builder (wavy)	6	8	12	16	18
SCBPT	Berm Packer (urethane)	6	8	12	16	18
SCBPW	Berm Packer (wire)	6	8	12	16	18
SCBE	Berm Enhancer	6	8	12	16	18
SKLSTS	Knife Shank w/repl. Standard Point (liquid)	6	8	12	16	18
SKDDTL	Knife Shank w/repl. Low Draft Point (liquid/dry)	6	8	12	16	18
SCCK10	10 degree knife coulter	6	8	12	16	18
SCCK15	15 degree knife coulter	6	8	12	16	18
SCHTA6R30	6 row 30" hydraulic tripper	1	-	-	-	-
SCHTA8R30	8 row 30" hydraulic tripper	-	1	-	-	-
SCHTASF12R30	12 row 30" hydraulic tripper (For Stack N Fold)	-	-	1	-	-
SCHTA12R30	12 row 30" hydraulic tripper	-	-	1	-	-
SCHTASF16R30	16 row 30" hydraulic tripper (For Stack N Fold)	-	-	-	1	-
SCHTA16R30	16 row 30" hydraulic tripper	-	-	-	1	-
SCHTA18R22	18 row 22" hydraulic tripper	-	-	-	-	1
SCSGW	Standard Gauge Wheel (set)	1	1	1	1	1
SCPDGW	Pump Drive Gauge Wheel (set)	1	1	1	1	1
SCTDF	Trailer Hitch	1	1	1	1	1
SCSTPO	Replacement knife point (mini Mole)(Parts)	6	8	12	16	18
SCLDPO	Replacement knife point (low draft)(Parts)	6	8	12	16	18



Inter Seeder rolling tines create some soil disturbance, improving the seed to soil contact. This improves the germination compared to seeds that are just broadcasted.

Model	11 Row	15 Row
Width	27.5"	37.5"
Weight (LBS.)	N/A	N/A
Category	CAT II & III	CAT II & III

## Features

- Gandy 10 cubic feet Orbit Air seed applicator
- Multiple species seed capability
- 11 row 27 ½' width
- 15 row 37 ½' width
- Category II and III w/quick hitch compatibility
- Independent row units
- 30" row width
- Parking stands





3950 Steffler Rd, Elmira Ontario, N3B 2Z3

Toll Free: 855-664-2752

Tel.: 519-664-2752

Fax: 519-664-3695

Email: [sales@mkmartin.ca](mailto:sales@mkmartin.ca)

[www.mkmartin.ca](http://www.mkmartin.ca)



**Authorized Dealer**