



# LIVING COUNTRY


EQUIPMENT FOR RURAL PROPERTY CARE



**7** YEAR WARRANTY



# New Additions to Our Lineup

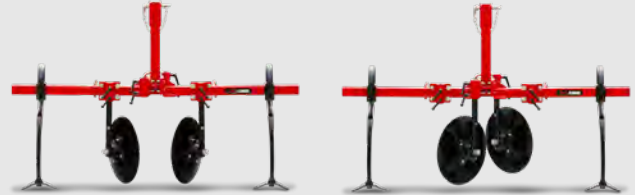

Hilling Position

Plowing Position

## GARDEN HILLER - NOW WITH PLOW

- Garden Hiller and Plow combination attachment
- Discs can be easily relocated to quickly change from plowing action to hilling action
- Adjustable disc height and horizontal spacing

See Page 47



## POTATO DIGGER

- Fits Cat.1 3ph tractors
- Tow-Behind Design with rear discharge
- 5 adjustable plowshare digging depths
- Adjustable sieve tine basket
- Reverberating camshaft
- Adjustable wheel base

See Page 48



## REDESIGNED COMMERCIAL SNOWBLOWER

- Up to 120" cutting width
- Compatible with 150HP - 250HP tractors
- HD450 steel wear plates on many key elements
- Optional truck loading chute
- Optional rotating fan housing/side discharge

See Page 15

# TABLE OF CONTENTS



**Snowblowers**

Page 01



**Commercial Snowblowers**

Page 09



**Loader Mounts & Power Packs**

Page 15



**Self Powered Snow Throwers**

Page 17



**3PH Rotary Cutters**

Page 19



**Rotary Cutters - Wing**

Page 25



**Skidsteer Rotary Cutters**

Page 26



**Extreme Duty Brush Cutters**

Page 27



**Finishing Mowers**

Page 29



**Trail/UTV Mowers**

Page 30



**Lawn Sweepers**

Page 31



**Rotary Sweepers**

Page 32



**3PH Box Blades**

Page 33



**Land Planes**

Page 34



**Grader Blades**

Page 35



**Land Levelers**

Page 38



**Grader Levelers**

Page 39



**Landscape Rakes**

Page 41



**Cultivators**

Page 42



**Track Curry**

Page 43



**Rotary Tillers**

Page 45



**Garden Hillers**

Page 47



**Potato Digger**

Page 48



**Trailer Backhoe**

Page 49



**Gravity Boxes**

Page 51



**Field Roller**

Page 55



**Weight Boxes**

Page 57



**Implement Caddy**

Page 58

# Single Auger Snowblowers



## SPECIFICATIONS

Models	SB48	SB54	SB60
HP (Rec.)	12 HP	15 HP	20 HP
Cutting Width	48"	54"	60"
Cutting Edge	¼ x 1-½	3/8 x 1	3/8 x 1
Auger Diam.	12"	14"	14"
Fan Diam.	19"	21"	21"
Chute Diam.	7"	8"	8"
Chute Rotation (Man/Hyd)		Select Option	
Chute Deflector	Manual	Manual Standard/ Hydraulic Option (see pg. 12)	
Main Body Height	22.5"	25"	25"
3PH Mount	Cat. 1	Cat. 1	Cat. 1
Weight (LBS.)	266	366	396



## FEATURES

- 7 year limited warranty
- High tensile steel fighting
- 3PH quick attach compatible
- 5 blade fan/impeller
- Manual chute deflector

## OPTIONS

- Hydraulic rotators (all models)
- Manual rotators optional on all models
- Hydraulic chute deflector

## WING KITS

- Fits SB54, SB60, SB68, and SB72
- 18" tall. Made with 10 gauge steel
- Increases path 2" per side

Part #

55399



## SPECIFICATIONS

Models	SB68	SB72	SB78	SB87	SB97
HP (Rec.)	30 HP	35 HP	50 HP	60 HP	75 HP
Cutting Width	68"	72"	78"	87"	97"
Cutting Edge	3/8 x 1	3/8 x 1	1/2 x 1-1/2	1/2 x 2	1/2 x 2
Auger Diam.	14"	14"	15"	19"	19"
Fan Diam.	21"	21"	23"	27"	27"
Chute Diam.	10"	10"	10"	12"	12"
Chute Rotation (Man/Hyd)	Select Option				
Chute Deflector	Manual Standard/ Hydraulic Option (see pg. 12)				
Main Body Height	25"	25"	29"	36"	36"
3PH Mount	Cat. 1	Cat. 1	Cat. 1 & 2	Cat. 2	Cat. 2
Weight (LBS.)	506	540	748	1,034	1,106

# Double Auger Snowblowers



## FEATURES

- 5 Blade impeller
- 7 year limited warranty
- High tensile steel fighting on top and bottom augers
- Cat. 2 - 3PH on model SB87D
- Cat. 2 & Cat. 3 on SB97D-SB120D
- Hydraulic chute rotator standard (SB97D - SB120D)
- Manual chute deflector on all models
- Skid shoes
- Fan housings is made with AR400 steel

## OPTIONS

- Optional hydraulic chute deflector on all models

## SPECIFICATIONS

Models	SB87D	SB97D	SB108D
Opt. 1000 RPM	-	Yes	Yes
HP (Rec.)	60 HP	100 HP	125 HP
Cutting Width	87"	97"	108"
Cutting Edge	½ x 2	½ X 6*	½ x 6*
Auger Diam.	15" (x2)	15" (x1) 19" (x1)	15" (x1) 19" (x1)
Fan Diam.	27"	32"	32"
Chute Diam.	12"	13"	13"
Chute Rotation (Man/Hyd)	Selection Req. (Pg. 13)		Hydraulic Standard
Chute Deflector (Man/Hyd)	Manual Deflector Standard/Hydraulic Option Pg.12		
Main Body Height	36"	43"	43"
3PH Mount	Cat. 2	Cat. 2 & 3	Cat. 2 & 3
Weight (LBS.)	1,161	1,900	1,980
Tube	3 ½" OD	4 ½" OD HEAVY WALL	4 ½" OD HEAVY WALL
Flighting	5/16 x 2 ¼	5/16 x 2-¼	5/16 x 2-¼
Roller Chain	#60 Heavy	#80	#80
Fan Depth	10"	12"	12"
Auger Drive Shaft	1 ¼"	1-¾"	1-¾"
Fan Output Shaft	40mm	2"	2"

Models	HP	PTO Shaft	RPM	1000 RPM Kit
SB87D	100-125	6 Spline	540	N/A
SB87DF	100-125	1 3/8" 21 spline	1000	Included
SB97D	100-125	6 Spline	540	N/A
SB97D175	125-175	6 Spline	540	N/A
SB97DF1.75	125-175	1 ¾" 20 Spline	1000	Included
SB97DF	150-200	1 3/8" 21 Spline	1000	Included
SB108D	100-125	6 Spline	540	N/A
SB108D175	125-175	6 Spline	540	N/A
SB108DF1.75	125-175	1 ¾" 20 Spline	1000	Included
SB108DF	150-200	1 3/8" 21 Spline	1000	Included

## 1000 RPM GEARBOX KIT

All models with "F" in the name come standard with the 1000 RPM Gearbox Kit.

The 1000 RPM Kit also raises the input shaft to allow the PTO shaft to run at a lesser angle on larger tractors increasing the efficiency and life of the driveline components. The reduction box allows you to reverse the rotation so you can mount a regular snow blower to the front of a tractor. PTO shaft not included.





MK Martin has completely redesigned the Pull Type Tractor Snowblower. Most notably with the redesign, the new Pull Type blower now cleans tight to the garage door, with no need for an additional back drag system. Connecting to your tractor's 3PH, the inverted snowblower allows you to drive straight forward pulling the blower instead of backing into the snow. Easier on your neck, the pull type blower is ideal for quickly clearing driveways and laneways.

## TIVAR WEAR PARTS

Tivar is a wear resistant plastic that replaces steel cutting edges and bolts onto the skid shoes.

Optional on Pull Type models, the tivar is gentler when clearing, ideal for interlocking brick and decorative stone.



Skid Shoe

Cutting Edge

Part #	Tivar Kit
<b>SB54PTTK</b>	Cutting Edge & Skid Shoes
<b>SB60PTTK</b>	Cutting Edge & Skid Shoes
<b>SB68PTTK</b>	Cutting Edge & Skid Shoes
<b>SB72PTTK</b>	Cutting Edge & Skid Shoes
<b>SB78PTTK</b>	Cutting Edge & Skid Shoes
<b>SB87PTTK</b>	Cutting Edge & Skid Shoes
<b>SB97PTTK</b>	Cutting Edge & Skid Shoes



## FEATURES

- Cleans tight to the garage door
- 5 blade impeller
- 7 year limited warranty
- High tensile steel flighting
- Multi-hinged deflector (SB68P/T – SB97P/T)

## OPTIONS

- Manual Rotator
- Hydraulic and electric chute rotators
- Hydraulic chute deflectors
- Tivar contact surfaces

## SPECIFICATIONS

Models	SB54PT-P	SB60PT-P	SB68PT-P	SB72PT-P	SB78PT-P	SB87PT-P	SB97PT-P
HP (Rec.)	25 HP	25 HP	35 HP	35 HP	50 HP	60 HP	60 HP
Cutting Width	54"	60"	68"	72"	78"	87"	97"
Cutting Edge	Bolt On (½ x 4)						
Auger Diam.	14"	14"	14"	14"	15"	15"	15"
Fan Diam.	21"	21"	21"	21"	23"	27"	27"
Chute Diam.	8"	8"	10"	10"	10"	12"	12"
Chute Rotation	Must select either Hydraulic (opt.) or Electric (opt.) or Manual (opt.)						
Chute Deflector	Manual Std./Opt. 6" cyl.			Manual Std./Opt. 8" cyl.			
Double Hood Deflector	N/A	N/A	Std.	Std.	Std.	Std.	Std.
Main Body Height	23"	23"	23"	23"	26"	28"	28"
3PH Mount	Cat. 1	Cat. 1	Cat. 1	Cat. 1	Cat. 1 & 2	Cat. 2	Cat. 2
Weight (LBS.)	462	495	671	685	900	1,175	1,260
Tube Size	2 3/8" OD	2 3/8" OD	2 3/8" OD	2 3/8" OD	3 ½" OD	3 ½" OD	3 ½" OD
Flighting Size	¼ x 2 ¼	¼ x 2 ¼	¼ x 2 ¼	¼ x 2 ¼	¼ x 2 ¼	5/16 x 2 ¼	5/16 x 2 ¼
Roller Chain Drive	# 50	# 50	# 60 Heavy	# 60 Heavy	# 60 Heavy	# 60 Heavy	# 60 Heavy
Fan Depth	5"	5"	7"	7"	8"	10"	10"
Blades Per Fan	5	5	5	5	5	5	5
Auger Drive Shaft Size	1"	1"	1 ¼"	1 ¼"	1 ¼"	1 ¼"	1 ¼"
Fan Output Shaft Size	1 3/8"	1 3/8"	1 3/8"	1 3/8"	40mm	40mm	40mm

# Pull Type Snowblowers



## SPECIFICATIONS

Models	SB54 P/T	SB60 P/T	SB68 P/T	SB72 P/T	SB78 P/T	SB87 P/T	SB97 P/T
<b>HP (Rec.)</b>	25 HP	25 HP	35 HP	35 HP	50 HP	60 HP	60 HP
<b>Cutting Width</b>	54"	60"	68"	72"	78"	87"	97"
<b>Cutting Edge</b>	Bolt On (1/2 x 4)						
<b>Auger Diam.</b>	14"	14"	14"	14"	15"	19"	19"
<b>Fan Diam.</b>	21"	21"	21"	21"	23"	27"	27"
<b>Chute Diam.</b>	8"	8"	10"	10"	10"	12"	12"
<b>Chute Rotation</b>	Must select either Manual (opt.) or Hydraulic (opt.) or Electric (opt.)						
<b>Chute Deflector</b>	Manual Std./Opt. 6" cyl.			Manual Std./Opt. 8" cyl.			
<b>Double Hood Deflector</b>	N/A	N/A	Std.	Std.	Std.	Std.	Std.
<b>Main Body Height</b>	25"	25"	25"	25"	28"	32-1/2"	32-1/2"
<b>3PH Mount</b>	Cat. 1	Cat. 1	Cat. 1	Cat. 1	Cat. 1 & 2	Cat. 2	Cat. 2
<b>Weight (LBS.)</b>	462	495	671	685	900	1,175	1,225
<b>Tube Size</b>	2 3/8" OD	2 3/8" OD	2 3/8" OD	2 3/8" OD	3 1/2" OD	3 1/2" OD	3 1/2" OD
<b>Flighting Size</b>	1/4 x 2 1/4	1/4 x 2 1/4	1/4 x 2 1/4	1/4 x 2 1/4	1/4 x 2 1/4	5/16 x 2 1/4	5/16 x 2 1/4
<b>Roller Chain Drive</b>	# 50	# 50	# 60 Heavy	# 60 Heavy	# 60 Heavy	# 60 Heavy	# 60 Heavy
<b>Fan Depth</b>	5"	5"	7"	7"	8"	10"	10"
<b>Blades Per Fan</b>	5	5	5	5	5	5	5
<b>Auger Drive Shaft Size</b>	1"	1"	1 1/4"	1 1/4"	1 1/4"	1 1/4"	1 1/4"
<b>Fan Output Shaft Size</b>	1 3/8"	1 3/8"	1 3/8"	1 3/8"	40mm	40mm	40mm



## FEATURES

- 5 blade impeller
- 7 year limited warranty
- High tensile steel flighting
- Standard manual chute deflector (all)
- Multi-hinged deflector (SB68P/T – SB97P/T)

## OPTIONS

- Hydraulic, manual and electric chute rotators
- Hydraulic chute deflectors
- Back drag (manual or hydraulic)
- Tivar contact surfaces

## BACK DRAG

Optional back drags are manual chain adjustment, and can be upgraded to a hydraulic option for 68" and wider models.



## TIVAR WEAR PARTS

Tivar is a wear resistant plastic that replaces steel cutting edges and bolts onto the skid shoes.

Optional on Pull Type models, the tivar is gentler when clearing, ideal for interlocking brick and decorative stone.



Skid Shoe

Cutting Edge

## WING KITS

- 18" tall. Made with 10 gauge steel
- Increases path 2" per side

Part #	
60962	Fits SB54, SB60, SB68, SB72
60963	Fits SB78, SB87, SB97



Back Drag	Lift Type
SB54PTRB	Man.
SB60PTRB	Man.
SB68PTRB17	Man. / Hyd.
SB72PTRB	Man. / Hyd.
SB78PTRB17	Man. / Hyd.
SB87PTRB17	Man. / Hyd.
SB97PTRB	Man. / Hyd.
Optional Hydraulic Kit (fits SB68PT - SB97PT)	
SBPTRBH17	

Part #	Tivar Kit
SB54PTTK	Cutting Edge & Skid Shoes
SB60PTTK	Cutting Edge & Skid Shoes
SB68PTTK	Cutting Edge & Skid Shoes
SB72PTTK	Cutting Edge & Skid Shoes
SB78PTTK	Cutting Edge & Skid Shoes
SB87PTTK	Cutting Edge & Skid Shoes
SB97PTTK	Cutting Edge & Skid Shoes

Back Drag Part #	Tivar Kit
SB54PTBDBTK	Back Drag
SB60PTBDBTK	Back Drag
SB68PTBDBTK	Back Drag
SB72PTBDBTK	Back Drag
SB78PTBDBTK	Back Drag
SB87PTBDBTK	Back Drag
SB97PTBDBTK	Back Drag

# 4000 SERIES Commercial Snowblowers


**CONQUER  
SNOW  
LIKE A  
PRO**



## FEATURES



**6 BLADE FAN**



**TWIN AUGER  
CHAIN DRIVE**



**HYDRAULIC  
CHUTE &  
MULTI-HINGE  
DEFLECTOR**



**OIL CHAIN BATH**

## OPTIONS



**ROTATING FAN HOUSING  
/ SIDE DISCHARGE**



**TRUCK LOADING CHUTE**


Part #  
**SB120TLC**



**BANK CUTTERS**

## SPECIFICATIONS

Models	SBR4097	SBR4108	SBR4120
HP (Rec.)	150-250	150-250	150-250
Cutting Width	97"	108"	120"
Main Body Height	47"	47"	47"
Mount	CAT. 2 & 3	CAT. 2 & 3	CAT. 2 & 3
Impeller (Fan)	36" - 3/8" HD 450 Steel		
Impeller Depth	12"	12"	12"
Impeller Blades	6	6	6
Impeller Output Shaft	2-1/2"	2-1/2"	2-1/2"
Rotating Housing	N/A	N/A	N/A
PTO Drive (RPM)	1,000	1,000	1,000
Stages	2	2	2
Rotor	Ribbon Flighting (Flight Notching Available)		
Rotor (Tube)	4-1/2" OD Heavy Wall		
Rotor (Flighting)	1/2" x 3" (Bottom) 5/16" x 2-1/4" (Top)		
Rotor (Diameter)	23" (Bottom) 15" (Top)		
Rotor (Drive Shaft)	1-3/4"	1-3/4"	1-3/4"
Roller Chain	#100	#100	#100
Cutting Edge	3/4" x 6" Bolt on Cutting Edge		
End Plates	3/8" HD 450 Steel x 48" High		
Chute Diameter	13"	13"	13"
Chute Rotator	Hydraulic	Hydraulic	Hydraulic
Deflector Stages	2	2	2
Chute Deflector	Hydraulic	Hydraulic	Hydraulic
Weight (LBS.)	3,230	3,350	3,485

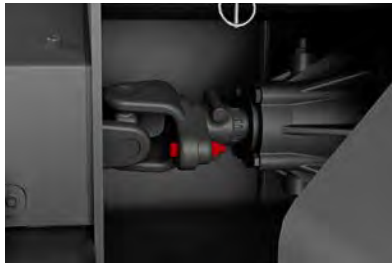

## SHEAR BOLT PROTECTION

## FEATURES

- 6-Blade Fan
- Twin Auger Chain Drive
- Hydraulic Chute & Multi-Hinge Deflector
- Chain is fully enclosed in oil bath
- Heat Treated Cutting Edge
- Shear Bolt Protection
- Dual Augers with Ribbon Flighting
- Adjustable Skid Shoes

RH Models*	SBR4097RH	SBR4108RH	SBR4120RH
Rotating Housing	Standard	Standard	Standard
Weight (LBS.)	3,490	3,610	3,745

\* RH models have the same specs as the corresponding models above, however they include a rotating fan housing.



**SCAN QR  
CODE TO SEE  
THE COMMERCIAL  
SNOWBLOWER  
IN ACTION**



## CHUTE ROTATOR

Meteor Snow Blower chute rotators come in manual (crank), hydraulic (orbital motor), and electric.



**Manual**

Part #	Description
SB48MR25	Fits 48" model
SB60MR25	Fits 54" and 60" models
SB68MR25	Fits 68" and 72" models
SB78MR25	Fits 78" models
SB87MR25	Fits 87s, 97s, 87D models
SB60PTMR25	Fits 60" Pull Type
SB68PTMR25	Fits 68" and 72" Pull Type
SB78PTMR25	Fits 78" Pull Type
SB87PTMR25	Fits 87" Pull Type
SB97PTMR25	Fits 97" Pull Type
SB54PT-PMR25	Fits 54" Performance Pull Type
SB60PT-PMR25	Fits 60" Performance Pull Type
SB68PT-PMR25	Fits 68" Performance Pull Type
SB72PT-PMR25	Fits 72" Performance Pull Type
SB78PT-PMR25	Fits 78" Performance Pull Type



**Hydraulic**

Part #
SBHR13



**Electric**

Part #
SBER13



## HYDRAULIC DEFLECTOR

Hydraulic chute deflector includes the cylinder and the hoses.

Part #	Applicable Models
SB68HD	Fits 54-72
SB75HD	Fits 78-120



## MULTI-HINGED DEFLECTOR

Meteor's Multi-Hinged Deflector provides you with finer control over where your snow is blown. Cylinder not included.

Part #	Applicable Models
SB78MHD	Fits 78
SB87MHD13	Fits 87-87D-97
SB108MHD	Fits 97D-120D



## TRUCK LOADING CHUTE

- Provides up to 40" of additional Height
- Hydraulic Rotation
- Hydraulic Multi-Hinged Deflector

Part #	Applicable Models
SB87TLC	87S, 97S, & 87D
SB108TLC	97D & 108D
SB120TLC	120D





## FEATURES

- Adjustable blower fan tolerance for increased performance
- Auger has new teeth
- New curved exit chute for a more direct stream
- 5 blade impeller
- Direct fan drive mounted
- Up To 4439 ft/min fan tip speed
- Pivoting hitch plate
- Hitch plate height adjustable
- Solid side plate construction for added strength and rigidity
- Offset chute for better operator vision
- Hydraulic line check valve allow overrun and prevents reverse rotation
- Solenoid valve feature allows for use of hydraulic rotator motor and hydraulic deflector
- Fan housings is made with AR400 steel

## OPTIONS

- Available with ALO or JD mount
- Hydraulic chute deflector
- Optional wiring kit adapters for skid loader control integration
- Optional multi hinge deflector
- Optional poly edge for skid shoes



## SPECIFICATIONS

Models	SSB62	SSB66	SSB76	SSB86	SSB96
Cutting Edge (Bolt-On)	½ x 4	½ x 4	½ x 4	½ x 4	½ x 4
Cutting Width	62"	66"	76"	86"	96"
Auger Tube	3 ½" Round				
Auger Flighting	5/16 x 2 ¼				
Auger Diam.	19"				
GPM (min)	14	14	14	23	33
Mounting	Universal Skidsteer Attach				
Chute Rotation	Hydraulic				
Chute Diam.	10"				
Main Body Height	27 ½"				
Chute Deflector	Manual Std/Hydraulic Opt				
Fan Diam.	24"		26"		
Fan Depth	8"				
Weight (LBS.)	910	928	970	1000	1,085

Flow Rates	HP*	Code
14-17 GPM	22	A
18-20 GPM	27	B
20-22 GPM	30	B+
23-26 GPM	35	C
27-33 GPM	43	C+
33-40 GPM	52	D

\*HP calculated at 2500 PSI  
Code "D" high flow package is recommended on the SSB 96.

## HYDRAULIC DEFLECTOR KIT

Part #	Description
SSB75HD	Hydraulic Deflector Kit

## WIRING KITS

Optional Wiring Kits	Description
SSBEWK 7-Bobcat	7 Pin Wire Kit
SSBEK 8Cat	8 pin wire kit
SSBEK 8 Terrex	8 Pin Wire Kit
SSBEK 14Gehl/Case/NH/JCB/Volvo	14 Pin Wire Kit
SSBEK 14JD	14 Pin Wire Kit
SSBEWK-KU/Kubota/Wacker Neuson	14 Pin Wire Kit

\*Wacker Neuson standard & high flow

# Loader Mount Snowblowers & Power Packs



## SPECIFICATIONS

Models	SSB66	SSB76	SSB86
Cutting Edge (Bolt-On)	½ x 4	½ x 4	½ x 4
Cutting Width	66"	76"	86"
Auger Tube		3 ½" Round	
Auger Flighting		5/16 x 2 ¼	
Auger Diam.		19"	
GPM		30	
Mounting		Universal Skidsteer Attach	
Chute Rotation		Hydraulic	
Chute Diam.		10"	
Main Body Height		27 ½"	
Chute Deflector		Manual Std/Hydraulic Opt	
Fan Diam.		24"	26"
Fan Depth		8"	
Weight (LBS.)*	928	970	1000

\* Weight includes snowblower only.



## FEATURES

- Hydraulic Chute Rotation
- Hydraulic Chute Deflector

**Available with the following quick tach:**  
(Must be specified at time of order)

- Universal skidsteer
- Euro (ALO)
- JD 440/540 combination

## POWER PACKS

- 3PH Mount PTO
- 30 Gal. Capacity
- 2,500 PSI at 30 Gallons per Minute
- SBLMPP-30 can be run for up to 2-hours before cool down is required



Models	SBLMPP-30	SBLMPPCS-30
<b>Recommended HP</b>	40-60HP	40-60HP
<b>Capacity (gallons)</b>	30	30
<b>Flow Rate (PSI)</b>	30 GPM/2500 PSI	30 GPM/2500 PSI
<b>Mount</b>	3PH	3PH
<b>Weight</b>	535 LBS.	575 LBS.
<b>Height</b>	48"	48"
<b>Width</b>	39"	39"
<b>Depth</b>	30"	32"
<b>Max Operating Temp. (°C)</b>	2° C	30° C
<b>Max Operating Time (hours)</b>	2 Hour Duty Cycle	Full Duty Cycle
<b>Cooling System Included</b>	No	Yes

# Self Powered Snow Throwers



## FEATURES

For tractors and compact skid loaders without hydraulic remotes, MK Martin offers our self powered snow thrower.

While being easy to attach with no drive lines or hoses to worry about, the engine belt drives the shaft which transfers power to the rotor by a roller chain.

These self powered snow throwers are ideal for moving snow quickly with precision in mind. The flared body opening helps to cut snow and direct to the efficient rotor assembly.

## SPECIFICATIONS

Model	SBR1054E	SBR1060E
Motor Type	Vanguard 14HP	Vanguard 14HP
Electric Start	12 Volt	12 Volt
Clutch	Electric (start/stop blower)	
Rotor	16" @ 750 RPM	
Hood Rotator	Electric	Electric
Hood Deflector	Manual	Manual
Cutting Edge	Bolt on 1/4" x 3-1/2"	
Overall Width	54"	60"
Overall Depth	36"	36"
Main Body Height	22.75"	22.75"
Weight	470 lbs.	545 lb.



Part #	Description
SBR1000JDMount	JD Mount Option

## WIRED REMOTE

The wired controller allows for remote starting and stopping of the rotor. Oversized buttons allows operators to make quick and accurate adjustment of the chute rotation.





## FEATURES

- Designed to fit Bobcat, Ventrac and Steiner articulating tractors
- Hydraulic chute rotation for smooth blowing
- Ideal for rural driveways and smaller commercial yards
- Compatible with:



## SPECIFICATIONS

Models	SBVEN48	SBVEN54
Cutting width	48"	54"
Cutting Edge	3/8 x 1"	
Auger Diam.	14"	
Fan Diam.	21"	
Chute Diam.	8"	
Chute Rotation	Hyd.	
Chute Deflector	Manual	
Body Height	25"	
Drive	Belt drive	
Mount	Bobcat/Ventrac/Steiner	
Weight (LBS.)	475	488



**BELT DRIVE**



**HYDRAULIC CHUTE ROTATE**



**STEINER/VENTRAC/BOBCAT MOUNT**

# 3PH Rotary Cutters



## FEATURES

- Maximum brush diameter 1"
- 7 year limited warranty
- Cat. 1 3PH
- Adjustable cutting height 2" – 10"
- Floating top link maintains cutting height
- Solid segmented wheels for no flat running
- 2 blade design
- Standard front and rear rubber guards
- Deck protection ring
- Fixed skid shoe

## OPTIONS

- Light duty slip clutch for driveline protection
- Chain curtains
- Rubber guard

## SPECIFICATIONS

Model	PRC48LD	PRC48	PRC54	PRC60	PRC66	PRC72	PRC72HD
Shipping Weight (LBS.)	320	380	430	500	560	625	635
3PH Mount	Cat. 1	Cat. 1	Cat. 1	Cat. 1	Cat. 1	Cat. 1	Cat. 1
Cutting Height	2" - 10"	2" - 10"	2" - 10"	2" - 10"	2" - 10"	2" - 10"	2" - 10"
Cutting Path	48"	48"	54"	60"	66"	72"	72"
Max Brush Diameter	1"	1"	1"	1"	1"	1"	1"
Tip Speed (Ft/Min)	13100	13100	14725	12462	13708	14955	14955
Wheels	16" (Air Filled)			16" (Segmented)			
Blades	½" x 3"	½" x 3"	½" x 3"	½" x 3"	½" x 3"	½" x 3"	½" x 3"
Tractor HP (min)	20	20	22	30	40	50	50
PTO RPM	540	540	540	540	540	540	540
Gearbox Rating	40	40	40	60*	60*	60*	75*
Deck	12 ga	12 ga	12 ga	12 ga	12 ga	12 ga	12 ga
Stump Jumper	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Rubber Guard	Optional	Optional	Optional	Optional	Optional	Optional	Optional
Protection (Std./Opt.)	Shear Pin / Slip Clutch	Shear Pin / Slip Clutch	Shear Pin / Slip Clutch	Shear Pin / Slip Clutch	Shear Pin / Slip Clutch	Shear Pin / Slip Clutch	Slip Clutch (Std.)

\* Based on field performance



### Chain Guards

#### Part # (Chain)

PRC48CHAIN16

PRC54CHAIN

PRC60CHAIN16

PRC66CHAIN16

PRC72CHAIN16

Includes both front and back chains.



### Slip Clutch

#### Part #

PRCSC

#### Description

Optional Light Duty Slip Clutch



### Rubber Guard kit

#### Part #

RC48RB

Rubber Guard option for 48" PRC/MKRC

RC54RB

Rubber Guard option for 54" PRC/MKRC

RC60RB

Rubber Guard option for 60" PRC/MKRC

RC66RB

Rubber Guard option for 66" PRC/MKRC

RC72RB

Rubber Guard option for 72" PRC/MKRC

# 3PH Rotary Cutters - 700 Series



## FEATURES

- 7" Deck Height
- Maximum brush diameter 2"
- 7 year limited warranty
- Cat. 1 3PH
- Adjustable cutting height 1.5" – 13"
- Floating top link
- Solid segmented wheels
- 2 blade design with stump jumper
- Standard front and rear rubber guards
- Deck protection ring
- Stump jumper
- Fixed skid shoe

## OPTIONS

- Light duty slip clutch for driveline protection
- Chain curtains

## SPECIFICATIONS

Model	MKRC748	MKRC760	MKRC766	MKRC772	MKRC772HD	MKRC784HD
<b>Cut Width</b>	48"	60"	66"	72"	72"	84"
<b>Weight (LBS.)</b>	420	535	605	640	730	840
<b>Hitch</b>	Cat. 1 Quick Hitch Compatible					
<b>Cutting Height</b>	1.5" - 13" / 10 Positions					
<b>Max Brush Diameter</b>	2"					
<b>Tip Speed (Ft/Min)</b>	13100	12462	13708	14955	15260	17803
<b>Wheels</b>	16" Segmented					X2
<b>Blades</b>	1/2" x 3"					
<b>Tractor HP (min)</b>	22	30	40	50	50	60
<b>PTO RPM</b>	540 RPM	540 RPM	540 RPM	540 RPM		
<b>Gearbox Rating *</b>	40	60	60	60	75	75
<b>Deck</b>	10 ga	10 ga	10 ga	10 ga	10 ga	10 ga
<b>Deck Height</b>	7"	7"	7"	7"	7"	7"
<b>Skirt Thickness</b>	3/16"	3/16"	3/16"	3/16"	3/16"	3/16"
<b>Stump Jumper</b>	Yes (Round)	Yes (Round)	Yes (Round)	Yes (Round)		
<b>Rubber Guard</b>	Std.	Std.	Std.	Std.	Std.	Std.
<b>Protection</b>	Shear Pin	Shear Pin	Shear Pin	Shear Pin	Slip Clutch	Slip Clutch

\* Based on field performance



### Chain Guards *Includes both front and back chains.*

Part # (Chain)
PRC48CHAIN16
PRC60CHAIN16
PRC66CHAIN16
PRC72CHAIN16
PRC84CHAIN16



### Slip Clutch

Part #	Description
PRCSC	Optional Light Duty Slip Clutch

# 3PH Rotary Cutters Plus



## FEATURES

- Maximum brush diameter 2"
- 7 year limited warranty
- Cat. 1 & Cat. 2 3PH
- Draw bar hitch (PRCPLUS120)
- Adjustable cutting height 2" – 10"
- Floating top link maintains cutting height
- Solid segmented wheels  
(PRCPLUS60 - PRCPLUS96 & PRCPLUS120-3PH)
- Pneumatic wheels (PRCPLUS120)
- 3 blade design with stump jumper
- Standard front and rear rubber guards
- Deck protection ring
- Slip clutch to protect the drive line
- Bolt on skid shoe

## OPTIONS


- Chain curtains



### Blade Assembly



### Floating Top Link



### Segmented Wheel



### Slip Clutch



## SPECIFICATIONS

Model	PRCPLUS60	PRCPLUS72	PRCPLUS84	PRCPLUS96	PRCPLUS120	PRCPLUS120-3PH
Shipping Weight (LBS.)	595	775	1045	1530	2320	2045
Hitch Type	Cat. 1 & 2 Quick Tach compatible			Draw Bar Hitch		Cat. 2
Cutting Height	2" - 10"	2" - 10"	2" - 10"	2" - 10"	2" - 10"	2" - 10"
Cutting Path	60"	72"	84"	96"	120"	120"
Max Brush Diameter	2"	2"	2"	2"	2"	2"
Tip Speed (Ft/Min)	12,462	15,260	17,803	16,500	14,500	14,500
Wheel Type (Qty.)	16" Segmented (1)	16" Segmented (1)	16" Segmented (2)	16" Segmented (2)	16" Pneumatic (2)	16" Segmented (2)
Blades	3 - 1/2" x 3"	3 - 1/2" x 3"	3 - 1/2" x 3"	3 - 1/2" x 3"	6 - 1/2" x 4"	6 - 1/2" x 4"
Tractor HP (min)	30-40	60	60	80	80	80
PTO RPM	540	540	540	540	540	540
Gearbox Rating *	75 HP	75 HP	90 HP	100 HP	120 HP	120 HP
Deck	3/16"	3/16"	3/16"	3/16"	9GA	9GA
Stump Jumper	Yes	Yes	Yes	Yes	Yes	Yes
Protection	Slip Clutch	Slip Clutch	Slip Clutch	Slip Clutch	Slip Clutch	Slip Clutch

\* Based on field performance



### CHAIN GUARDS *Includes both front and back chains.*

#### Part # (Chain)

PRC60CHAIN16

PRC72CHAIN16

PRC84CHAIN16

PRC96CHAIN16

PRC120CHAIN

### DRAW BAR KIT

For 84" & 96" models. Kit consists of components shown in black in this image; red components for illustration only.

#### Part #

PRCDB84-96






## FEATURES

- 15' dual wing rotary cutter
- 4 heavy duty gearboxes, each covered with 7 year limited warranty
- Transport lock for each wing
- 1.5" diameter cutting capacity
- Each wing can float to conform to ground contours

## SPECIFICATIONS

Model	PW180
Shipping Weight (LBS.)	4,400
3PH Mount	Draw Bar Hitch
Cutting Height	3"-15"
Cutting Path	180"
Max Brush Diameter	1.5"
Overall Width (Wings Down)	184"
Folded Width (Wings Up)	78"
Tip Speed (Ft/Min)	15,100 ft/min on Wings 14,850 ft/min on center
Wheels (Pneumatic)	21"
Blades	9 blades 1/2"x4"
Tractor HP (min)	75HP
PTO RPM	540
Gearbox Rating (Wing)	140 HP
Gearbox Rating (Center)	105 HP
Gearbox Rating (Divider)	87 HP
Deck	3/16"
Stump Jumper	Yes
Protection	Independent Slip Clutch on Each Spindle
Wing Float Range(degrees)	20 down and 33 up

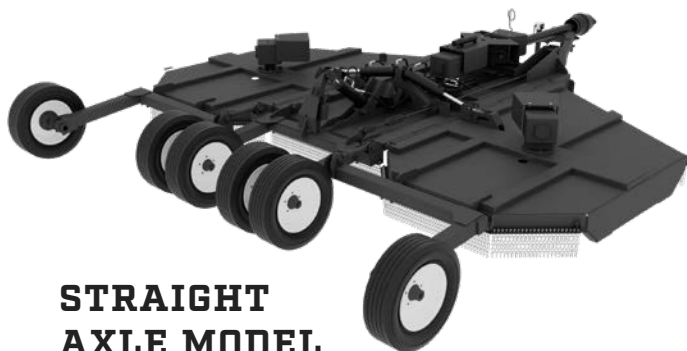

**STRAIGHT  
AXLE MODEL**



**WALKING  
TANDEM  
AXLE MODEL**

Model	Description
PW180SP	Straight Axle with 6 Pneumatic Tires
PW180SS	Straight Axle with 6 Solid Tires
PW180TP	Walking Tandem Axle with 8 Pneumatic Tires
PW180TS	Walking Tandem Axle with 8 Solid Tires



## FEATURES

- Maximum brush diameter 2"
- 3 blade cutting assembly
- Integrated push bar
- Relief valve for protection
- Chain curtain
- Floating linkage allows the cutter to follow ground contour
- Deck protection ring

## SPECIFICATIONS

Model	Description	Brush Diameter	Deck Thickness	Weight (LBS.)
PRCH60-A	60" Rotary Cutter	2"	3/16"	760
PRCH60-B	60" Rotary Cutter	2"	3/16"	760
PRCH60-B+	60" Rotary Cutter	2"	3/16"	760
PRCH72-A	72" Rotary Cutter	2"	3/16"	860
PRCH72-B	72" Rotary Cutter	2"	3/16"	860
PRCH72-B+	72" Rotary Cutter	2"	3/16"	860
PRCH72-C	72" Rotary Cutter	2"	3/16"	860
PRCH72-C+	72" Rotary Cutter	2"	3/16"	860
PRCH72-D	72" Rotary Cutter	2"	3/16"	860



Flow Rates	Pack. Codes
14-17 GPM	A
18-20 GPM	B
20-22 GPM	B+
23-26 GPM	C
27-33 GPM	C+
33-40 GPM	D

## OPTIONAL BOLT-ON GAUGE WHEEL

- 16" segmented wheel
- 2"-9" wheel adjustment /5 holes

Part #

PRCH-WK



*To ensure optimum performance, hydraulic output must match motor package.*

# Extreme Duty Brush Cutters



## DIRECT MOUNTED MOTOR

The hydraulic radial piston direct mounted motor and heavy duty bearing assembly deliver tip speeds of up to 20,000 ft. per minute and produce powerful torque at lower speeds for continuous cutting and faster recovery.

(A)



(B)



## REVERSIBLE FRONT PUSH BAR

One side (A) has aggressive teeth for accurate pushing and directional control of larger trees. The reverse side (B) is smooth, intended for flattening dense underbrush.



## HEAVY DUTY 10" CUT CAPACITY

Easily power through dense brush, woody vegetation even 10 inch diameter trees across fields, forests and trails.



## 4 REPLACEABLE FLAIL KNIVES

Mounted on the rotor are 4 replaceable pivoting flail knives designed to deliver maximum centrifugal velocity and shear force on every rotation.



## HEAVY DUTY 1" THICK ROTOR

78" diameter oversized rotor is manufactured using a 1" thick steel plate.

EXTREME DUTY

# BRUSH CUTTER



## FEATURES

- 78" Brush Cutter - Skid Steer attachment
- 86.5" Machine Width
- 10" cut capacity
- Radial Piston Motor (4 pkgs up to 40GPM)
- Recommend 20+GPM
- Higher Torque capability at low speeds
- Up to 4000psi operating pressure
- Heavy duty 1" cutting bar; 4 cutting blades
- Optional bolt-on inserts
- Tip speed of 20,000 ft/min
- 1/4" deck thickness
- Replaceable skid shoes
- 2200 LBS approximate weight
- Reversible push bar (trees/brush/grass)
- **7 year limited consumer warranty**
- 1 year limited commercial warranty**



### OPTIONAL BOLT-ON MULCHING KNIVES

Bolt-on mulching knives go on the bottom of the rotor to effortlessly mulch through stumps and logs.



### OPTIONAL CARBIDE CHIPPER KNIVES

Another option for mulching stumps and logs are the optional carbide tipped mulching knives.

## SPECIFICATIONS

Model	BCH78XD
Description	78" Brush Cutter
Machine Width	86.5"
Cutting Path	78"
Max Brush Diameter	10"
Radial Piston Motor	4 pkgs up to 40GPM
Recommended GPM	20+GPM
Torque	Higher Torque capability at low speeds
Operating Pressure	Up to 4000 psi
Blades	4 blades
Heavy Duty Cutting Bar	1"
Tip Speed	20,000 ft/min
Deck Thickness	1/4"
Shipping Weight (LBS.)	2,200

## OPTIONS

Part #

BCH78XD-BK - BOLT ON MULCHING KNIFE KIT

BCH78XD-MK - CARBIDE TIP CHIPPER KNIFE KIT

## MOTOR OPTIONS

Part #

A - 14-20GPM

B - 20-26 GPM

C - 26-33 GPM

D - 33-40 GPM



## FEATURES

- 7 year limited warranty
- Cat. 1 hitch
- 4 solid rubber tires
- Floating end link
- Taper lock pulleys
- Solid scalp roller



Pictured: Rear Discharge Model

## SPECIFICATIONS

Model	PFM48RD	PFM60RD	PFM72RD	PFM90RD
Cutting Width	48"	60"	72"	90"
Overall Width	50"	62"	74"	93"
Weight (LBS.)	370	435	525	714
Acres/Hr@5 MPH	2.43	3.03	3.63	4.57
HP Required	14/20	20/25	25/30	30/40
3PH Mount	Cat. 1	Cat. 1	Cat. 1	Cat. 1
RPM @ PTO Shaft	540	540	540	540
Number of Blades	3	3	3	5
Tip Speed (Ft/Min)	15,660	18,000	16,850	16,288
Wheels	Solid Rubber Wheel	Solid Rubber Wheel	Solid Rubber Wheel	Solid
Deck Thickness	10 GA	10 GA	3/16"	3/16"
Cutting Height	2" - 5"	2" - 5"	2" - 5"	2" - 5"



## FEATURES

- 44" - 48" Cutting Width
- Briggs & Stratton Engines
- 12 Volt electric start
- Remote e-Stop
- 2 Rotors with 3 blades each
- Adjustable cutting height (2"-7") with ratchet style adjustment
- 3 position hitch for straight or offset cutting
- Flat free tires
- Swivel wheels on front, fixed wheels on rear



## SPECIFICATIONS

Model	PTM48
Engine Brand	Briggs & Stratton
Engine	19 HP
Starting System	Key (electric)
Fuel Tank	3 Gal.
Battery	12 Volt
Deck	Rear Discharge
Deck Thickness	10 ga
Blade Assembly	2 Rotors with 3 Blades each
Cut Width	44"
Cut Height	2" - 7"
Max Brush Diameter	3/4"
Wheels	12" x 3.5" Flat free tires
Weight	720 lbs



## REMOTE E-STOP

Cabled e-Stop can be placed on tow vehicle for easy reach.



## FEATURES

- Electrically Controlled Poly Broom with Remote
- Leaf Bucket with Pivot for Easy Emptying
- Replaceable Durable Mesh Netting
- Flat Free Tires
- 6.5 HP Vanguard Engine



## ELECTRIC DUMP OPTION

Simply back up to your compost pile and dump your load using electronic controls.

### Part #

MKLSEDL



## HEIGHT ADJUSTMENT

Height Adjustment is controlled with a switch box with a magnetic base for easy mounting to your tow unit.

## SPECIFICATIONS

Model	MKLS1846
Sweeping Width	46"
Overall Width	65"
Length	95"
Motor (HP)	6.5 HP Vanguard Engine
Brush Diameter	19"
Drive System	Chain - Fully Engaged so the brush turns all the time
Broom Lift	12V Electric
Hopper Capacity	21 Cu.Ft.
Wheels	12" x 3.5" flat free tires
Weight (LBS.)	515



## FEATURES

- Engine powered and hydraulic powered options
- Skidsteer and loader mounting options
- 60 inch sweeping width
- 30 degree sweeping angle
- Hydraulic and electric angling options
- 7 Year consumer warranty

## SPECIFICATIONS

Model	MKCS1960H - Hydraulic Drive	MKCS1960 - Gas Engine
Motor	8-12 GPM	6.5 HP Vanguard Engine
Sweeping Width	60"	60"
Overall Width	64 1/2"	64 1/2"
Brush Diameter	19"	19"
Drive System	Chain- Fully engaged so the brush turns all the time	Chain- Fully engaged so the brush turns all the time
Lateral Swivel	3°	3°
Sweeping Angle	30° on each side	30° on each side
Angling Options	Manual (std), Hydraulic (optional), Electrical Actuator(optional)	
Sweep Length @ 30°	54 1/4"	54 1/4"
Wheels	6" x 2" Caster Wheels	6" x 2" Caster Wheels
Weight	455 lbs. approx.	455 lbs. approx.
Mounting Options	SS Quick Attach (Standard), JD Loader Mount, ALO Quick Attach, TORO-DINGO Plate (Available)	

## OPTIONS

Part #	Description
62799	Hydraulic Angling
62800	Electric Angling

## MOUNT OPTIONS

Part #	Description
55410	Standard Skidsteer Plate
55420	ALO/Euro Mount
56020	JD 440/550 Q-tach
56483	Avant Mount
56488	Toro/Dingo Mount

# 3PH Box Blades



## FEATURES

- Reversible Hardened Steel Cutting Edges
- 2 Cutting Edges allow you push or pull material
- Height Adjustable Ripper Shanks
- Bolt On 3PH Design
- Quick hitch compatible



## SPECIFICATIONS

Model	Width	Shanks	Mouldboard	End Plates	3PH Mount	Max HP	Weight (LBS.)
BB448STD	4'	4	3/16"	1/4"	Cat. 1	35 HP	308
BB454STD	4'6"	4	3/16"	1/4"	Cat. 1	35 HP	340
BB560STD	5'	4	3/16"	1/4"	Cat. 1	35 HP	348
BB566HD	5'6"	4	3/16"	1/4"	Cat. 1	45 HP	415
BB672HD	6'	5	3/16"	1/4"	Cat. 1	45 HP	450
BB784HD	7'	6	3/16"	1/4"	Cat. 1	45 HP	500
BB784DLX	7'	6	1/4"	1/4"	Cat. 2	75 HP	555
BB896DLX	8'	7	1/4"	1/4"	Cat. 2	75 HP	612

## HEIGHT ADJUSTABLE

The height adjustable scarifier shanks break up the soil allowing the cutting edge to redistribute the material as the box scraper is pulled along.



## REPLACEABLE SCARIFIER TIPS

Control how deep the scarifier rips with the Box Scrapers easy to use pin adjustment on the shanks. Removable shanks feature replaceable scarifier tips.

*Replaceable Scarifier Tips on removable shanks.*





## FEATURES

- Two ½" x 6" Reversible Cutting Edges
- 3/8" x 2 Reversible Skid Shoes
- Cutting Edges are adjustable in 1" increments for optimal performance
- Hydraulically adjustable scarifier bar
- Grader quality shanks with replaceable tips
- Order Mount separately (3PH or Skidsteer Adapter)
- AR400 Abrasion-Resistant Skid Shoes

## OPTIONS

- Mount – Select the correct mount for application at time of order

## SPECIFICATIONS

Model	MKLP678	MKLP778	MKLP878
Working Width	72"	84"	96"
Overall Width	77"	89"	101"
Length	69.5"	69.5"	69.5"
Shank (Qty.)	6	6	8
Shank Tube		4" x 6" x ¼"	
Cutting Edge (x2)	Hardened ½" - Reversible 1" Adjustments		
Skid Shoes	3/8" x 2 Reversible		
Cylinder	Dual Hydraulic Cylinders for shank rotation		
Weight (LBS.)	1,140	1,240	1,350

NOTE: Hitch must be ordered separately.

## OPTIONS

Options	Part #	Weight (LBS.)
Optional Skidsteer Adapter	MKLPSSMNT	156
Optional 3PH Adapter (Cat. 1 & 2)	MKLP3PTMNT	36



## FEATURES

- Five Stops of angle adjustment (Each Forward and Back)
- Full Turn Around
- ½" x 6" Reversible Cutting Edge
- 3/8" Mouldboard (98 Series)
- Quick hitch compatible

## SPECIFICATIONS

Model	Max. HP	Width	Mouldboard	Mouldboard Height	Center Pin	Max angle position	Width when Angled	3PH Mount	Weight (LBS.)
MKGB588	45	5'	3/16"	15"	2"	45 deg Left/Right	42"	Cat. 1	180
MKGB688	45	6'	¼"	15"	2"	45 deg Left/Right	50"	Cat. 1	200
MKGB788	45	7'	¼"	15"	2"	45 deg Left/Right	59"	Cat. 1	215
MKGB798	75	7'	3/8"	15"	3"	45 deg Left/Right	72"	Cat. 2	577
MKGB898	75	8'	3/8"	15"	3"	45 deg Left/Right	82"	Cat. 2	616

## OPTIONS

Model	Description
MKGB88ANG16	Hydraulic Angle - Includes the Hydraulic Cylinder and Hoses
MKGB98ANG	Hydraulic Angle - Includes the Hydraulic Cylinder and Hoses



## FEATURES


- Angle Manual Adjustment
- Offset Manual Adjustment
- Tilt Manual Adjustment
- 180° Reversible
- Bolt-On Cutting Edge
- Park Stand

## SPECIFICATIONS

Model	MKGB5880T	MKGB6880T	MKGB7880T
HP	30 - 50	30 - 50	30 - 50
Hitch	Cat. 1	Cat. 1	Cat. 1
Width	60"	72"	84"
Weight (LBS.)	250	258	270
Reverse	Yes	Yes	Yes
Mouldboard	1/4"	1/4"	1/4"
Mouldboard Height	15"	15"	15"
Cutting Edge	3/8 x 6 Reversible		
Angle (Control)	Manual	Manual	Manual
Angle (Position)	5 Forward / 5 Reversed		
Offset Adjust	5 Positions	5 Positions	5 Positions
Tilt Adjust	5 Positions	5 Positions	5 Positions
Offset	24" left / 24" right	24" left / 24" right	24" left / 24" right
Max angle position	45 deg Left/Right	45 deg Left/Right	45 deg Left/Right
Width when Angled	42"	50"	59"

## RUBBER CUTTING EDGE

These optional rubber cutting edges are ideal for snow removal, reducing damage to driveways.



*(Optional on Light Duty, Standard, & Offset Tilt Grader Blades)*

Model	Description
MKGBRCE5	5' Rubber Cutting Edge Kit
MKGBRCE5.5	5.5' Rubber Cutting Edge Kit
MKGBRCE6	6' Rubber Cutting Edge Kit
MKGBRCE7	7' Rubber Cutting Edge Kit
MKGBRCE8	8' Rubber Cutting Edge Kit
MKGBRCE9	9' Rubber Cutting Edge Kit
MKGBRCE10	10' Rubber Cutting Edge Kit

## HYDRAULIC KIT

Includes hoses, cylinders, bolt-on plates, hardware.



Model	Description
MKGBOTAng	Angle Kit
MKGBOTTilt	Tilt Kit

# XD Grader Blades




## FEATURES

- Extreme Duty Grader Blade
- Available up to 14' grading path
- For tractors up to 250 HP
- Hydraulic cylinders control the blade angle, blade tilt and offset of the arm



## FEATURES



**HYDRAULIC  
ANGLE**

**HYDRAULIC  
TILT**

**HYDRAULIC  
OFFSET**

## SPECIFICATIONS


Model	MK8XD-100	MK9XD-100	MK9XD-150	MK10XD-150	MK12XD-250	MK14XD-250
Horse Power (Max.)	100	100	150	150	250	250
3PH Mount	Cat. 2 & 3					
Mouldboard Thickness	5/16"				3/8"	3/8"
Mouldboard Width	96"	108"	108"	120"	144"	168"
Mouldboard Height	20"				20"	20"
Offset Adjustment	27" left or right (hydraulic)					
Adjustment Angle	32° left or right (hydraulic)			37° left or right (hydraulic)		
Adjustment Tilt	13° blade adjustment (hydraulic)					
King Pin	3-1/2"	3-1/2"	4"	4"	5"	5"
Cutting Edge	High Carbon 1/2" x 6" (reversible)					
Weight (LBS.)	1,572	1,666	1,695	1,745	1,925	2,075

## OPTIONS

Part #	Description	Weight
MKGBXD-TW	Tail Wheel Kit	310 lbs.
MKGBXD-EP	Box End Plates	
MKGBXD-SK	Skid Shoe Kit	



**TAIL  
WHEEL KIT**



**BOX END  
PLATES**



**SKID  
SHOE KIT**



These rugged scrapers come in a range of sizes from 8 to 12 feet to fit your needs and your equipment. Standard on all models is our 1/2 inch thick reversible hardened cutting edge, ready to smooth out the bumps and fill in the hollows. Cutting depth is controlled by a 3"x12" hydraulic cylinder so you can decide how much of a bite to take and adjust on the go. All models are well suited for feedlot and soil reclamation or swale cutting.



## TRAILED MODEL SPECIFICATIONS


Trailed Models	LLT-8	LLT-10	LLT-12
Width	8'	10'	12'
Mount	Hitch	Hitch	Hitch
Horse Power (Max.)	165	165	165
Tilt	Yes	Yes	Yes
Cutting Edge	Single	Single	Single
Side Plate	3/8"	3/8"	3/8"
Mouldboard	1/4"	1/4"	1/4"
Mouldboard Height	30"	30"	30"
Mouldboard Depth	32"	32"	32"
Wear Plate	NA	NA	NA
Skidbar	1/2" Reversible	1/2" Reversible	1/2" Reversible
Weight	1,555	1,771	1,898

### FEATURES

- 1/2" x 6" reversible hardened cutting edge
- Equipped with a 15" jack
- 3" x 12" hydraulic lift cylinder
- 3" x 6" cylinder to tilt 10° each way
- GPS Mount ready




**ADJUSTABLE SKID BARS**

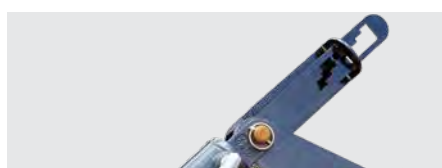

**TILT INDICATOR**



**TRANSPORT LOCK**



Top View



## FEATURES

- Two ½" x 6" Reversible Cutting Edges
- 3/8" x 2 Reversible Skid Shoes
- Cutting edges can be manually adjusted to your desired cutting depth for optimal performance
- Order Mount separately (3PH or Skidsteer Adapter)
- AR400 Abrasion-Resistant Skid Shoes

## OPTIONS

- Mount – Select the correct mount for application at time of order

## SPECIFICATIONS

Model	Working Width	Overall Width	Skid Shoes	Mouldboard Thickness	Cutting Edge	Weight (LBS.)
MKGL578	60"	65"	3/8" x 2 Reversible	¼"	1" Adjustment	600
MKGL678	72"	77"	3/8" x 2 Reversible	¼"	1" Adjustment	665
MKGL778	84"	89"	3/8" x 2 Reversible	¼"	1" Adjustment	730
MKGL878	96"	101"	3/8" x 2 Reversible	¼"	1" Adjustment	796

NOTE: Hitch must be ordered separately.

## OPTIONS

Options	Part #	Weight (LBS.)
Optional Skidsteer Adapter	MKGLSSMNT	156
Optional 3PH Adapter (Cat. 1 & 2)	MKGL3PTMNT	36



Top View



## FEATURES

- Two angled 1/2" x 6" Reversible Cutting Edges
- Cutting Edge Angled between 5° - 9° depending on model
- 3/8" x 2 Reversible Skid Shoes
- Cutting edges can be manually adjusted to your desired cutting depth for optimal performance
- Order Mount separately (3PH or Skidsteer Adapter)
- AR400 Abrasion-Resistant Skid Shoes

## OPTIONS

- Mount – Select the correct mount for application at time of order

## SPECIFICATIONS

Model	Working Width	Overall Width	Skid Shoes	Mouldboard Thickness	Cutting Edge	Cutting Angle (Deg.)	Weight (LBS.)
MKGL578A	60"	65"	3/8" x 2 Reversible	1/4"	1" to -0.5"	9	568
MKGL678A	72"	77"	3/8" x 2 Reversible	1/4"	1" to -0.5"	7	632
MKGL778A	84"	89"	3/8" x 2 Reversible	1/4"	1" to -0.5"	6	697
MKGL878A	96"	101"	3/8" x 2 Reversible	1/4"	1" to -0.5"	5	761

NOTE: Hitch must be ordered separately.

## OPTIONS

Options	Part #	Weight (LBS.)
Optional Skidsteer Adapter	MKGLSSMNT	156
Optional 3PH Adapter (Cat. 1 & 2)	MKGL3PTMNT	36



## FEATURES

- Cat. 1 Quick Tach compatible
- 5/16" x 1" x 15.25" spring tines
- 5 forward and 3 reverse positions with manual adjustment

## OPTIONS

Part #	Description
MKGB88ANG16	Hydraulic Angle Kit
MKLRWK	Gauge Wheel Kit

## OPTIONAL GAUGE WHEEL KIT

## SPECIFICATIONS

Model	MKLR4	MKLR5	MKLR6	MKLR7	MKLR8
Width	4'	5'	6'	7'	8'
MAX HP	50	50	50	50	50
Weight (LBS.)	246	250	263	285	302
Tines	24	30	36	42	48
Max Angle	45°	45°	45°	45°	45°
Width at Max Angle	32"	41"	50"	57"	66"



## FEATURES

- Adjustable S-tine configuration
- Ideal for cultivating small fields and gardens

## OPTIONAL BOLT-ON 7" SWEEPS

### Part #

CUSweeps

CUPoints



## SPECIFICATIONS

Model	CU-5	CU-6	CU-7
Working Width	60"	72"	84"
Overall Width	60-1/2"	72-1/2"	84-1/2"
Weight (LBS.)	164	193	222
Tines (Heat Treated)	9 tines	11 tines	13 tines
3PH Mount	Cat. 1	Cat. 1	Cat. 1



## OPTIONAL GAUGE WHEEL KIT

### Part #

CUWK

*(4" depth adjustment, 2.5"x12" rubber wheel)*



## FEATURES

- Two rows of adjustable S-Tines
- Adjustable Leveling Bar
- 12" Rolling Drum (adjustable)
- Spill Plates direct material into the working width
- Quick Hitch Compatible

## OPTIONS

- Wing – levels and reclaims material around the edge of arenas
- Scarifier Bar – Used for working up hard pack
- Sprinkler Kit



## SPILL PLATES

Every MK Martin Track Curry comes with two standard spill plates. These funnel any excess material into the Track Curry's path, ensuring your arena or track keeps looking its best.



## SPECIFICATIONS

Model	TC-5	TC-6	TC-7	TC-8
<b>Working Width</b>	5'	6'	7'	8'
<b>Number of Shanks</b>	13	15	17	19
<b>Shank Size</b>	1-1/4" x 3/8" x 22"			
<b>Shank Clearance</b>	16"	16"	16"	16"
<b>3PH Mount</b>	Cat. 1	Cat. 1	Cat. 1	Cat. 1
<b>HP Rating</b>	18 - 32	22 - 39	26 - 47	30 - 53
<b>Weight (LBS.)</b>	460	530	640	725
<b>Leveling Bar</b>	1/2" x 6" (double beveled)			



## WING

The optional Track Curry wing from MK Martin easily levels the edge of the riding arena for a clean and professional look.

## OPTIONS

Part #	Option
<b>TC Wing</b>	Track Curry Wing
<b>TCSA5</b>	5' Scarifier Bar
<b>TCSA6</b>	6' Scarifier Bar
<b>TCSE12</b>	12" Scarifier Extension (x2)
<b>TCSK</b>	Sprinkler Kit



## SCARIFIER BAR

Dig deeper with the optional scarifier bar. Each shank on the scarifier bar is height adjustable, or can be removed or inverted for the right amount of action.



## SPRINKLER KIT

Equipped with a 25 gallon tank, the optional sprinkler kit reduces the amount of dust being thrown into the air when working with dry material.

For 7 & 8 foot scarifier bars please order the following parts combinations to match your width.

Width	Combine
<b>7 foot</b>	TCSA5 + TCSE12
<b>8 foot</b>	TCSA6 + TCSE12

# 3PH Rotary Tillers



## FEATURES

- Replaceable Bolt-On Tines
- Self Lubricating Chain Drive
- Adjustable Skidshoes
- Floating Deflector
- Gear Box
- 3PH Mount Offset
- Slip Clutch

## SPECIFICATIONS

Models	MKRT486	MKRT546	MKRT606	MKRT726
Horsepower	15-30 HP	20-40 HP	20-50 HP	25-60 HP
Hitch	Cat. 1	Cat. 1	Cat. 1	Cat. 1
Inner Width (in.)	50	54	58	74
Overall Width (in.)	55.375	59.375	63.375	79.375
Weight (lbs.)	491	514	525	636
Number of Flanges	6	6	7	9
Tines/Flange	6 (C-Shape)	6 (C-Shape)	6 (C-Shape)	6 (C-Shape)
Flange Spacing (in.)	7.75	7.75	7.75	7.75
Max Tillage Depth (in.)	6.5	6.5	6.5	6.5
Number of Skid Shoe Settings	5	5	5	5
Rotor Diameter (in.)	17"	17"	17"	17"
Rotor Speed @ 540 PTO (RPM)	211	211	211	211
Gearbox (HP)	50HP @ 540	50HP @ 540	50HP @ 540	50HP @ 540
Drive Chain	#80	#80	#80	#80



## FEATURES

- Skid steer attachment plate
- 74" working width
- 9 tine flanges
- 6 tines per flange
- Working depth 6.5"
- 17" rotor

## SPECIFICATIONS

Models	MKRT726HYD-SF	MKRT726HYD-HF
<b>Flow</b>	Standard	High Flow
<b>Hitch</b>	Skidsteer Attachment Plate	Skidsteer Attachment Plate
<b>Inner Width (in.)</b>	74	74
<b>Overall Width (in.)</b>	79.375	79.375
<b>Weight (lbs.)</b>	725	725
<b>Number of Flanges</b>	9	9
<b>Tines/Flange</b>	6 (C-Shape)	6 (C-Shape)
<b>Flange Spacing (in.)</b>	7.75	7.75
<b>Max Tillage Depth (in.)</b>	6.5	6.5
<b>Rotor Diameter (in.)</b>	17"	17"
<b>Drive Chain</b>	#80	#80

Flow Rates	
<b>Standard</b>	16-28 GPM
<b>High Flow</b>	28-40 GPM

*To ensure optimum performance, hydraulic output must match motor package.*

# Garden Hillers With Plow



**NEW  
PRODUCT**



**Hilling Position**

**Plowing Position**

## FEATURES

- Garden Hiller and Plow combination attachment
- Discs can be easily relocated to quickly change from plowing action to hilling action
- Shanks & sweeps keep soil loose after tractor compaction
- Adjustable disc height and horizontal spacing
- Discs angle is adjustable
- 2x2 steel tube construction
- Steel storage stand

## SPECIFICATIONS

Model	MKGH60
Width	60"
Hitch	Cat. 1
Disc	14"
Weight	100 lbs.

**NEW  
PRODUCT**



## FEATURES

- Fits Cat.1 3ph tractors
- Tow-Behind Design with rear discharge
- 5 adjustable plowshare digging depths
- Adjustable sieve tine basket
- Reverberating camshaft
- Adjustable wheel base
- Anti-vibration rubber bushings
- Lower lift pins and top link pin included

## SPECIFICATIONS

Model	MKPD20
Working Width	19"
Overall Width	41 13/16"
Overall Length	51 1/2"
Overall Height	38 3/8"
Digging Depth	11"
PTO	540 RPM
3PH Mount	Cat.1
HP Requirements	18HP (min) - 35 HP (max)
Weight	340 lbs.
Wheels	17", adjustable air-filled
Wheel adjustment	2 positions to adjust dig depth



## FEATURES

- 360 degree rotation
- 4ft 11" working depth
- 1764lbs (800kg) digging force
- Towable design





## SPECIFICATIONS

MKBT810	Standard Setup
Engine HP	14 HP Gasoline
Start up	Electric
Digging Force	800 kg/1,764 lbs
Bucket Reach	204 cm / 6' 8"
Working Depth	160 cm / 5 ft 3 inches
Tongue Weight	113 kg / 250 lbs
Lifting Capacity	200 kg / 440 lbs
Total Weight	600 kg / 1323 lbs
Total Reach of Boom	270 cm / 8' 10"
Hydraulic Pressure	16 MPA / 2,320 psi
GPM	7.5 GPM at 1800 RPM




**14HP  
GASOLINE ENGINE**



**5 FOOT  
WORKING DEPTH**



**360 DEGREE ROTATION**

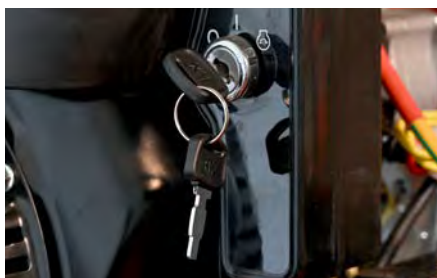

**ELECTRIC START**



**CURVED BOOM DESIGN**



**12" & 18" BUCKET WITH  
MECHANICAL THUMB**



## SPECIFICATIONS

Model	MKGW3200			MKGW5000		
Extension	N/A	8"	19"	N/A	8"	12"
Capacity (Bushels)	335 bu	395 bu	480 bu	520 bu	595 bu	635 bu
Hopper Construction	14 GA.			12 GA.		
Under Structure	3" x 6" x .188 wall rectangular tube			4" x 8" .188" wall rectangular tubing		
Unloading Door	45" width			57" width (standard) 28" width x2 (divider)		
Chute Height	17"-20"			17"-21"		
Box Dimensions						
Length	158"	158"	158"	196"	196"	196"
Width	96"	96"	96"	101"	101"	101"
Height (less wagon)	78"	86"	98"	89"	98"	101"
Height (wagon & 22.5" wheel)	102"	110"	122"	123"	131"	135"
Weight (LBS.)	1,980	2,130	2,270	3,610	3,845	3,915
Wheel Base	112"			142"		
Suggested Wagon	275 Horst Wagon - 425/22.5 Tires			365 Horst Wagon - 425/22.5 Tires		

\* Wagon options not included in list price. Wagon options are available at an additional cost.  
Bushel capacities were verified with dry corn tested at 56 lbs./bu.

## WAGON OPTIONS

Part #	Description
horstWA-BR2WDI	Brakes
horstWA-SBD	Spring Balancer (Double)



## SPECIFICATIONS

Model	MKGW6500			MKGW12000
<b>Extension</b>	N/A	8"	12"	N/A
<b>Capacity (Bushels)</b>	690 bu	785 bu	835 bu	1,200 bu
<b>Hopper Construction</b>	12 GA.			12 GA.
<b>Under Structure</b>	4" x 8" .188" wall rectangular tubing			4x8x.25w
<b>Unloading Door</b>	57" width (standard) 28" width x2 (divider)			15" length x 47" width X 2
<b>Chute Height</b>	16"-20"			18" (Side Discharge)
Box Dimensions				
<b>Length</b>	229"	229"	229"	315"
<b>Width</b>	115"	115"	115"	110"
<b>Height (less wagon)</b>	91"	99"	103"	136"
<b>Height (wagon &amp; 22.5" wheel)</b>	125"	133"	137"	156"
<b>Weight (LBS.)</b>	4,645	4,915	5,005	17,500
<b>Wheel Base</b>	156"			215"
<b>Suggested Wagon</b>	485 Horst Wagon - 425/22.5 Tires			608 Horst Wagon- 425/22.5 Tires (with brakes)

\* Wagon options not included in list price. Wagon options are available at an additional cost.  
All wagons come with used 425 truck tires. Tarp kit is included in the price for the 12000 model.



## HYDRAULIC DOOR OPENER


Part # MKGW-HYD Door	Description
<b>MKGW50HD</b>	Hydraulic Door Opener (MK5000)
<b>MKGW65HD</b>	Hydraulic Door Opener (MK6500)



The Hydraulic Door allows you to conveniently control the metering of the material using a remote from your tractor.

## DIVIDER KIT

Part #	Description
<b>MKGW32DIV</b>	Center Divider (MK3200)
<b>MKGW50DIV</b>	Center Divider (MK5000)
<b>MKGW65DIV</b>	Center Divider (MK6500)

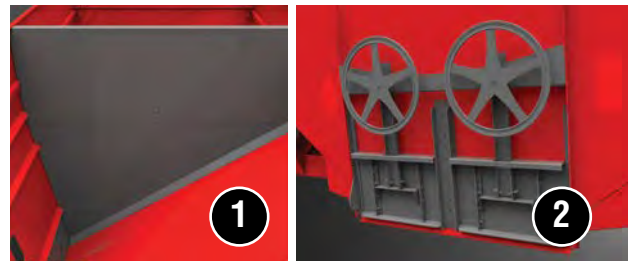

The optional divider splits your Gravity Box **1**, allowing for two separate commodities to be in the box at the same time. Each side also has it's own door for individual unloading and metering **2**.

## UNLOADING AUGER

Adjustable hopper attaches to the exit door. Available in either stainless or black powder coated down spout.

Part #	Description
<b>MKGWAT6X16</b>	6" x 16' auger with cupped steel flighting & telescopic down spout.
<b>MKGWAT8X16</b>	8" x 16' auger with cupped steel flighting & telescopic down spout.
<b>MKGWATSS6X16</b>	6" x 16' stainless steel auger with cupped flighting & telescopic down spout
<b>MKGWATSS8X16</b>	8" x 16' stainless steel auger with cupped flighting & telescopic down spout





## GRAIN SHIELD TARP KIT

Part #	Capacity
MKGW32TS	320-450
MKGW50TS	500-610
MKGW65TS	645-800

\* Comes standard on MKGW12000 model.



This ratchet-free locking system not only protects the contents from blowing away and from inclement weather, but also locks quickly and easily so you can head out sooner.

## REAR LADDER KIT

Part #	Description
MKGW32LAD	Fits 3200 Models
MKGW50LAD	Fits 5000 & 6500 Models



The optional rear ladder gives another access point for operators to look into the Gravity Box.

## CENTER DUMP

Part #	Description
MKGW32CD	Center Dump for 3200
MKGW65CD	Center Dump for 5000 & 6500




The optional center dump directs the unloading material beneath the gravity box, ideal for when the unloading area isn't wide enough for standard side dumping.



## FEATURES

- Working width of 34 feet, 36 feet, 41 feet and 46 feet
- 36 inch drum diameter
- Half inch wall thickness for extra durability
- Weight per foot ranging from 475 lbs to 453 lbs
- Narrow transport width of 164"
- Forward fold design allows for quick setup and fold up
- Mud scraper on the backside prevents mud build up on the drums
- Made in Canada and backed by our 7 year warranty
- Road Lights




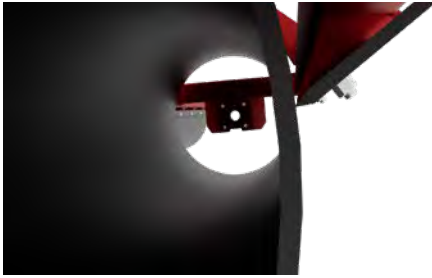

**1/2 INCH THICK DRUM**



**34' - 46' WIDTHS**

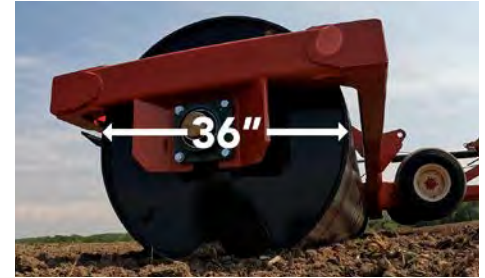

**36" DRUM DIAMETER**



**FORWARD FOLD DESIGN**



**MUD SCRAPER**



**NARROW TRANSPORT WIDTH**



**3" DRUM SHAFT & BEARING**

## SPECIFICATIONS

Models	R3436	R3636	R4136	R4636
Field Working Width	34'	36'	41'	46'
Min. Req. HP	140 HP	144 HP	164 HP	184 HP
Frame Sections	11.5' -12' - 11.5'	12.5' -12' - 12.5'	15' -12' - 15'	17.5' -12' - 17.5'
Section Overlap	5"	5"	5"	5"
Machine Weight	16,190 lbs	17,275 lbs	19,055 lbs	20,855 lbs
Weight Per Foot	475 lbs	479 lbs	464 lbs	453 lbs
Drum Dia.	36"	36"	36"	36"
Drum Wall Thickness	1/2"	1/2"	1/2"	1/2"
Center Frame Transport Cylinder	5" x 48" cylinder	5" x 48" cylinder	5" x 48" cylinder	5" x 48" cylinder
Wing Boom Cylinder	4" x 48"	4" x 48"	4" x 48"	4" x 48"
<b>U-Joint &amp; Pivot Pin Diameter 2" w/ Maintenance Free Composite Bushings</b>				
Drum Roller Shaft Diameter	3"	3"	3"	3"
<b>Transport</b>				
Dimensions	164"W x 270"L x 150"H	164"W x 270"L x 150"H	164"W x 270"L x 150"H	164"W x 270"L x 150"H
Tires (4)	12.5LX15FI	12.5LX15FI	12.5LX15FI	12.5LX15FI



## FEATURES

- 3.5 cu. ft. internal volume
- 525 lbs maximum holding weight
- Cat. 1 & 2 3PH compatible
- Tool holder
- Clean out hatch
- 2" Hitch receiver



## SPECIFICATIONS

Model	MKWB
Hitch Type	Cat. 1 & 2
Box Volume	3-½ cu ft
Max Weight (box and fill) (LBS.)	575
Max Weight (fill only) (LBS.)	525
Quick Hitch Compatible	Yes
Max 2" Receiver Load (LBS.)	500
Shipping Weight (LBS.)	104

Fill Type	Weight Per Cubic Foot (lbs.)
Concrete	150
Gravel	110
Sand	100



## FEATURES

- Ratchet adjustment standard
- Inline or offset caddy
- Height adjustable clevis hitch
- Includes toplink
- Adjustable (width) lower points
- Maximum load 1,600 lbs.



## ADJUSTABLE HITCH

Adjust the hitch to ensure your mower is level.

## OPTIONS

- Hydraulic adjustment
- Inline hydraulic lock for transport



## HYDRAULIC (OPTION)

Hydraulically lifts the mower up and down.

Part #

Hydraulic Lift

## SPECIFICATIONS

Model	MKC1200	MKC1201
Weight (LBS.)	1,900	1,835
Max Implement Weight	1,600 lbs.	1,600 lbs.
Lift Cyl.	3x8	3x8
Tires	11L 15	11L 15
Main Frame	7x7 Tube	7x7 Tube
RPM	540	540
Driveline	#5	#5



Effective on products retailed on or after October 1, 2022

Seven Year Limited Consumer Warranty  
90 Day Limited Commercial Warranty including Gearboxes

Commercial includes rental and industrial applications.

Warranty begins at the time of customer delivery and is activated upon warranty registration receipt at MK Martin Enterprise Inc.

Warranty coverage is null and void unless the Warranty Registration form has been **completed in full and is on file at MK Martin Enterprise Inc.**

Keep your registration copy in a safe place, it is required as proof of warranty activation.

This new and unused product is warranted by MK Martin Enterprise Inc. to be free from defects in material and workmanship under normal use and regular service as described in the owner's manual, for a consumer period of 7 years from the date of delivery, and commercial period of 90 days, including gearboxes, from the date of delivery. Warranty is limited to the replacement of parts and / or repair of the product.

If issues develop within the warranty period with the product, contact the local dealer from which you purchased the unit. Only MK Martin authorized dealers may make repairs to the product or affect the replacement of defective parts, unless otherwise approved by MK Martin. Repairs / replacement will be done at no charge within a reasonable time after the receipt of the product. This warranty does not cover the following items:

1. Normal replacement of service items.
2. Normal maintenance or adjustments.
3. Machines or parts lost or damaged during shipment,
4. Accessory items / parts not supplied by MK Martin
5. Damages resulting from:  
misuse, negligence, accident, theft or fire  
use of improper or insufficient fuel, fluids or lubricants  
use of aftermarket parts or accessories, unless approved by MK Martin  
modifications, alteration, tampering or improper repair  
any device or accessories installed other than an authorized dealer.
6. Tires are covered by the manufacturer of the tire and the warranty period specified by that manufacturer. Please contact the tire manufacturer for warranty on these items.

MK Martin Enterprise Inc. shall not, in any event, be liable for any losses, damages or costs; to include profits, travel, transportation, pick up, delivery, towing cost, tow vehicle, loss of use, whether special, incidental, consequential or otherwise, in any way. Unit or parts are returned at the customer's expense.

Include a copy of your completed Warranty Registration form with any claim as proof of warranty activation. There are no warranties, expressed or implied, other than those specified herein. No agent, employee or other person has any authority to vary any of the foregoing provisions.

Warranty coverage is null and void unless the Warranty Registration form has been completed in full and is on file at MK Martin Enterprise Inc. Warranty begins at the time of customer delivery and is activated upon Warranty Registration receipt at MK Martin Enterprise Inc.


# Custom/Standard Colors /Setup Fees

## Standard Colors

Product	Standard Color
Gravity Box	Red, Green, or Blue
Snow Blowers	Charcoal or Red
Commercial Blowers/Throwers	Charcoal, Industrial Yellow
Rotary Cutters & Mowers	Charcoal, Industrial Yellow
Axis Tool Arms	Charcoal
Box Grader & Grader Blades	Charcoal
XD Grader Blades	Industrial Yellow
Land Leveler	Industrial Yellow
Grader Leveler	Industrial Yellow
Land Plane	Industrial Yellow
Track Curry	Industrial Yellow
Rotary Tiller	Charcoal
Landscape Rake	Charcoal
Cultivators	Charcoal
Weight Box	Charcoal
Dump Box	Charcoal

## Custom Colours

Custom tractor match colours will be provided at no extra charge.

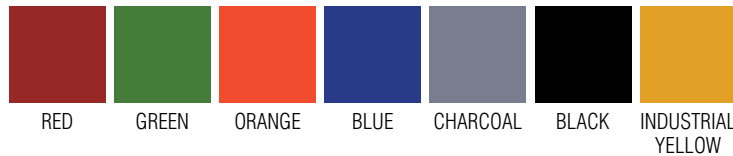

## Setup Fees

Any other setup charges not listed will be subject to a rate of \$75.00/hr.

**E&OE** Errors and omissions excepted November 2024. Pricing and specifications printed in this catalogue are current at printing and may be subject to change without notice. For current information on all of our products, please contact MK Martin directly.

**7** YEAR WARRANTY

**M** MKMARTIN



# LIVING COUNTRY

EQUIPMENT FOR RURAL PROPERTY CARE



**M** MKMARTIN

**Authorized Dealer**

3950 Steffler Rd., Elmira Ontario, N3B 2Z3

Toll Free: 855-664-2752

Tel: 519-664-2752

Email: [sales@mkmartin.ca](mailto:sales@mkmartin.ca)

[www.mkmartin.ca](http://www.mkmartin.ca)

